



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN17A0113~124	2017-10-14	Lingpeng	Add The Label And Change The Title
C	N180019	2019-03-02	Peng	Add 5Pole
D	C230888	2023-07-03	He Long	△D *3

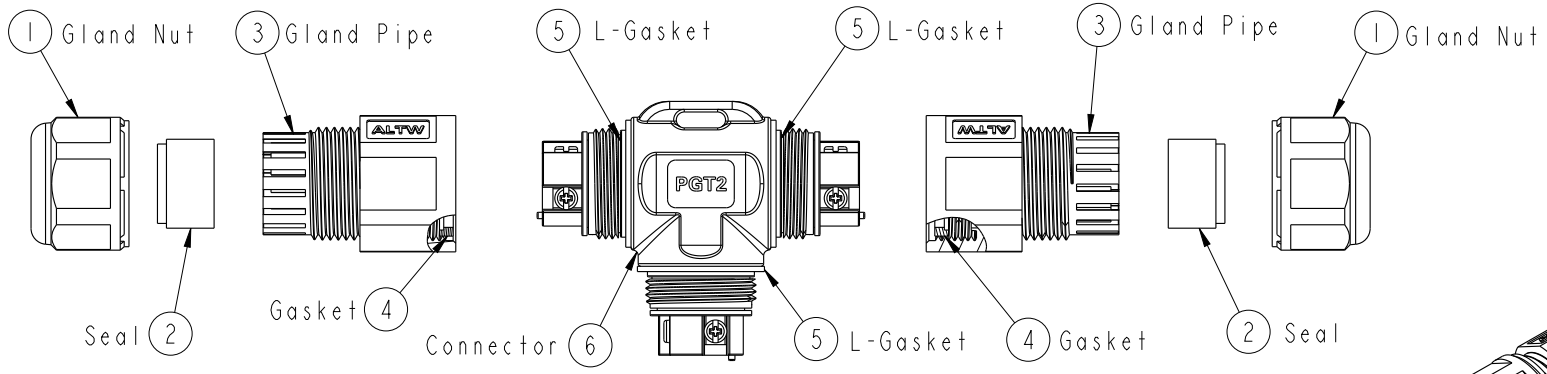


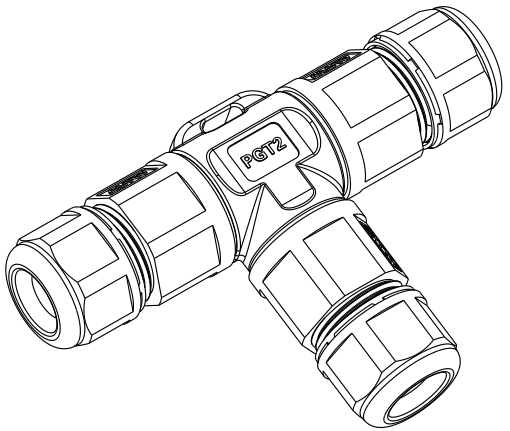


ALTW
CONFIDENTIAL
2019-03-02
R&D DEPT.

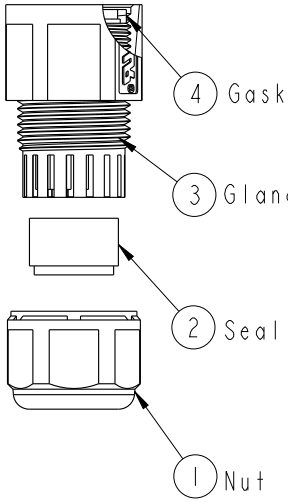

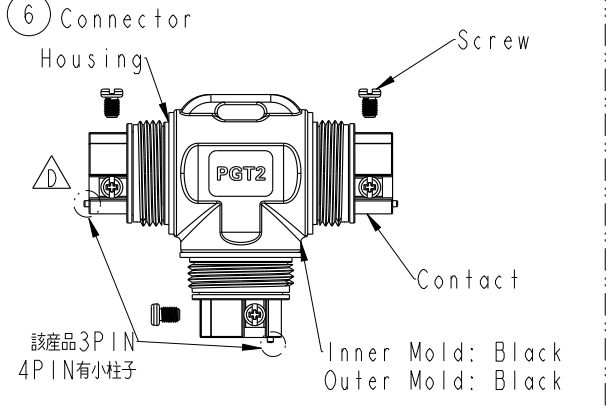

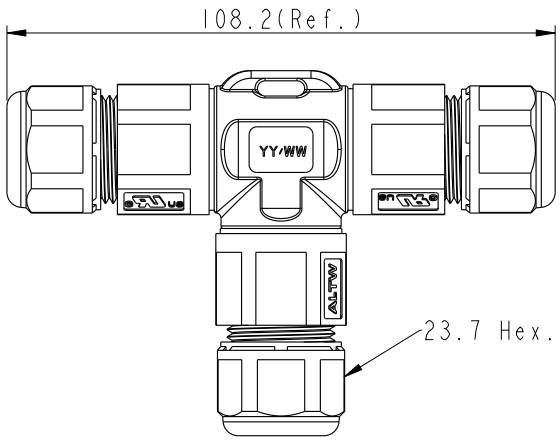

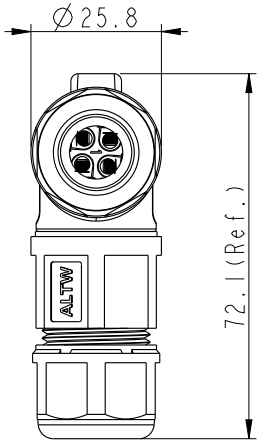


UNIT: mm	TITLE: △B ULT2 Cable Joiner Screw-in Type		ITEM NO:
TOLERANCE ±0.5mm	SCALE 67:100 / SIZE A4 / SHEET 1 OF 2	Amphenol LTW 安費諾亮泰企業股份有限公司	DWG NO: SC-L-ULT2-XX-XX
	REV. D / WC-REV. .0 / QC: Inspection item		CUSTOMER: ALTW


DRAWN BY: Peng	DATE: 2019-03-02	
CHECKED BY: Mafei	DATE: 2019-03-02	
APPROVED BY: Jerry	DATE: 2019-03-02	

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

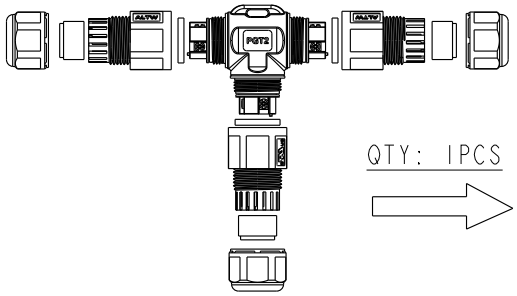

QTY: 1PCS

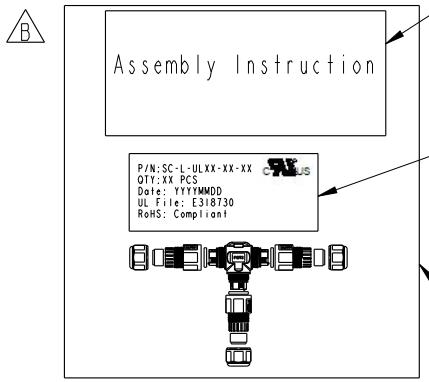


8 Instruction

10 Label

7 PE Bag

QTY: 75PCS

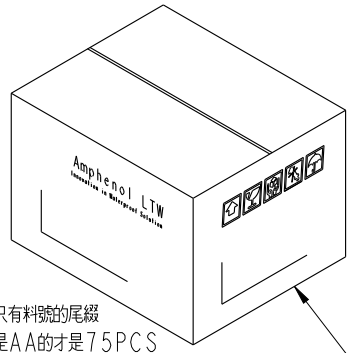

9 Carton

D 只有料號的尾綴
是AA的才是75PCS
其他料號爲90PCS

ALTW
CONFIDENTIAL
2019-03-02
R&D DEPT.

Both A Unassembled product And An Instruction Are In A PE Bag.
（將一套未組裝的產品和說明書，放置於一個PE袋，並封口）

SC-L-ULT2-XX-XX

L:Cable Joiner

Type: ULT2

No. of Condutor: 02-2Poles
03-3Poles
04-4Poles
05-5Poles


C Seal's Color:

BL-Blue(藍色)	For Cable Range: Ø4.5~Ø6.5mm
YW-Yellow(黃色)	For Cable Range: Ø6.5~Ø8.5mm
GN-Green(綠色)	For Cable Range: Ø8.5~Ø10.5mm
RD-Red(紅色)	For Cable Range: Ø10.5~Ø12.5mm
AA-All Seals	For Cable Range: Ø4..5~Ø12.5mm


D 圓柱表示該產品有小柱子
沒有標註的PIN表示產品沒有小柱子

Note: C
* (QC) Important Dimension To Check.
* Waterproof Rate: IP68 (50M,24H)
* Housing: PA66+GF, Black.
* Gland Nut: PA66, Black.
* Gland Pipe: PA66, Black.
* Contact: Brass, Nickel Plated
* Gasket & L- Gasket : Silicone, Yellow.
* Seal: Silicone, Blue & Yellow & Green & Red.
* Rated Voltage: 2~5 Pole 600V AC
* Rated Current: 2 & 3 Pole Max. 20A ,
4 Pole Max. 15A.
5 Pole Max. 10A.
* Operating Temperature: -40°~+105°.
* Gland Pipe Recommended Tightening Torque:
8~10 Kgf.cm(0.78~0.98 N.m)
* Gland Nut Recommended Tightening Torque:
8~10 Kgf.cm(0.78~0.98 N.m)
* Seal For Cable OD: Ø4.5~Ø6.5mm, Blue.
Ø6.5~Ø8.5mm, Yollow.
Ø8.5~Ø10.5mm, Green .
Ø10.5~Ø12.5mm, Red.
* Screws for Wire connection recommended tightening torque: 2.00~4.50kgf.cm / 0.196~0.44 N.m
* Applicable Wire gauge: 2~4 Pole:18AWG ~ 12AWG
5 Pole:20AWG ~ 16AWG
* UL2238 Certification


Pole Assignments Front View




2 Pole



3 Pole



4 Pole



5 Pole

UNIT: mm	TITLE: B ULT2 Cable Joiner Screw-in Type		ITEM NO	DRAWN BY: Peng	DATE: 2019-03-02
TOLERANCE ±0.5mm	SCALE: 67:100	SIZE: A4	SHEET: 2 OF 2	DWG NO: SC-L-ULT2-XX-XX	CHECKED BY: Mafei	DATE: 2019-03-02
	REV: D	WC-REV: .0	(QC): Inspection item	CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2019-03-02

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.