

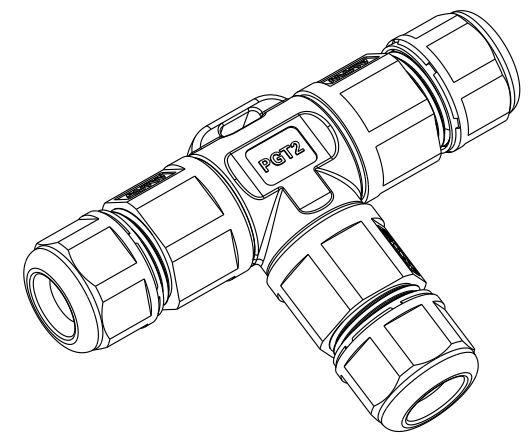
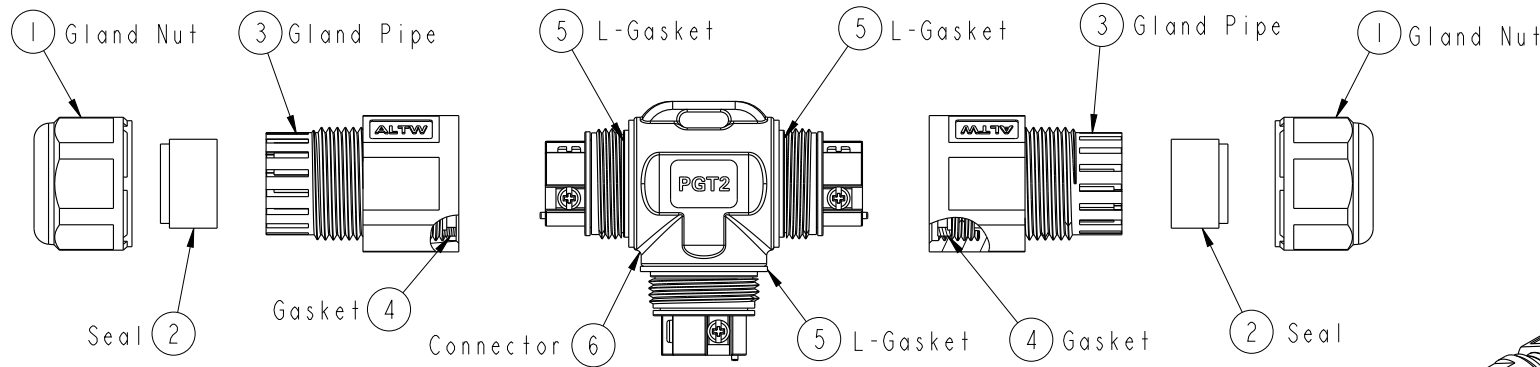
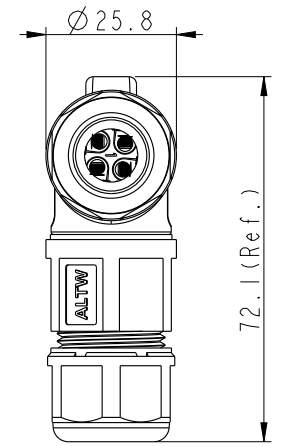
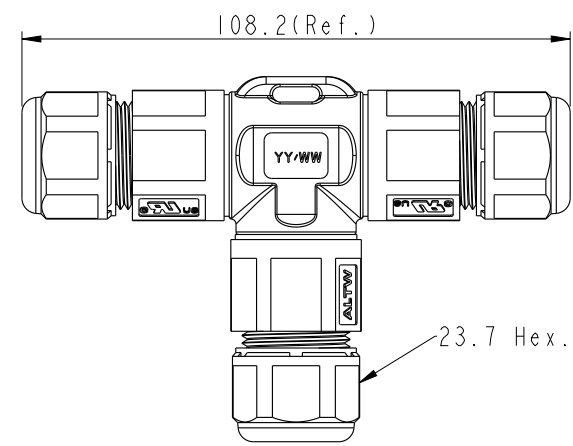


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN17A0113~124	2017-10-14	Lingpeng	Add The Label And Change The Title
C	NI80019	2019-03-02	Peng	Add 5Pole
D	C230888	2023-07-03	He Long	$\triangle D$ *3

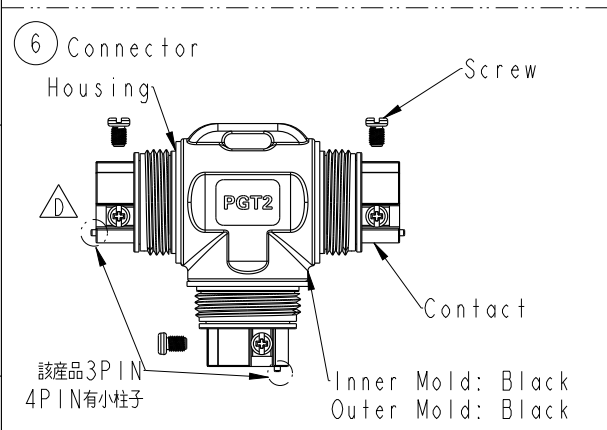


ALTW
CONFIDENTIAL
2019-03-02
R&D DEPT.

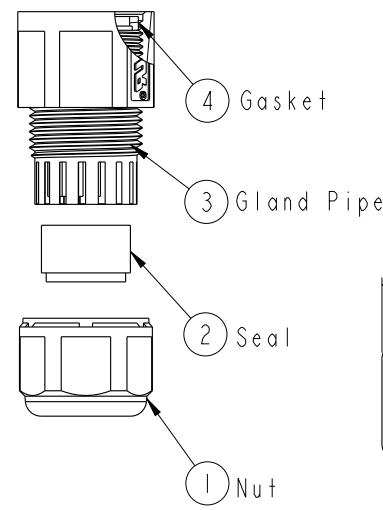


UNIT:mm			TITLE $\triangle B$ ULT2 Cable Joiner Screw-in Type		
TOLERANCE $\pm 0.5mm$			SCALE 67:100	SIZE A4	SHEET 1 OF 2
			REV. D	WC-REV. .0	QC: Inspection item


Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Peng	DATE 2019-03-02
		DWG NO SC-L-ULT2-XX-XX	CHECKED BY Mafei	DATE 2019-03-02
		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-03-02

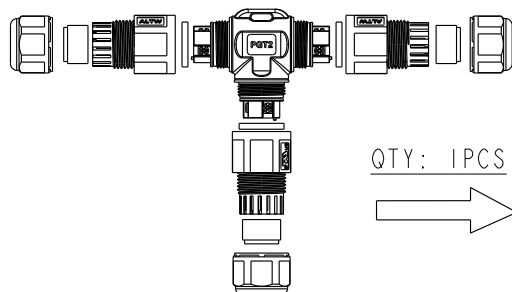

QTY: 1PCS

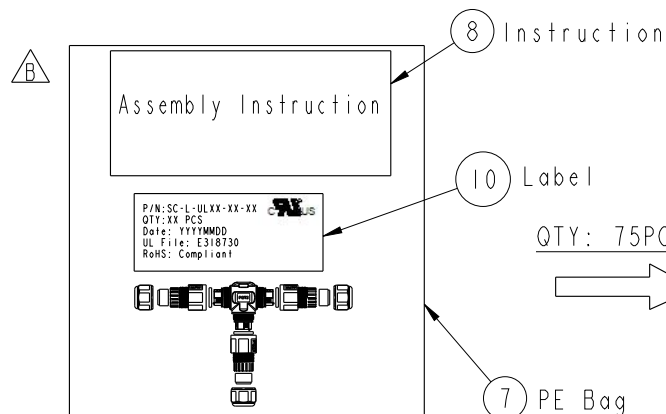

QTY: 75PCS

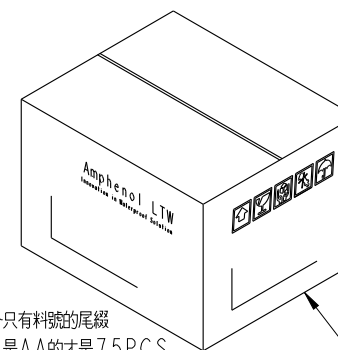

只有料號的尾綴
是AA的才是75PCS
其他料號為90PCS

9 Carton

ALTW
CONFIDENTIAL
2019-03-02
R&D DEPT.

Both A Unassembled product And An
Instruction Are In A PE Bag.

(將一套未組裝的產品和說明書, 放置於一個PE袋, 並封口)

SC-L-ULT2-XX-XX

L: Cable Joiner


Type: ULT2

Seal's Color: BL-Blue(藍色) For Cable Range: $\varnothing 4.5 \sim \varnothing 6.5\text{mm}$
 YW-Yellow(黃色) For Cable Range: $\varnothing 6.5 \sim \varnothing 8.5\text{mm}$
 GN-Green(綠色) For Cable Range: $\varnothing 8.5 \sim \varnothing 10.5\text{mm}$
 RD-Red(紅色) For Cable Range: $\varnothing 10.5 \sim \varnothing 12.5\text{mm}$
 AA-All Seals For Cable Range: $\varnothing 4.5 \sim \varnothing 12.5\text{mm}$


No. of Conductor: 02-2Poles
 03-3Poles
 04-4Poles
 05-5Poles

圖柱表示該產品有小柱子
沒有標註的PIN表示產品沒有小柱子


Pole
Assignments
Front View




2 Pole



3 Pole



4 Pole




5 Pole

Note: C

- * **QC** Important Dimension To Check.
- * Waterproof Rate: IP68 (50M, 24H)
- * Housing: PA66+GF, Black.
- * Gland Nut: PA66, Black.
- * Gland Pipe: PA66, Black.
- * Contact: Brass, Nickel Plated
- * Gasket & L- Gasket: Silicone, Yellow.
- * Seal: Silicone, Blue & Yellow & Green & Red.
- * Rated Voltage: 2~5 Pole 600V AC
- * Rated Current: 2 & 3 Pole Max. 20A ,
4 Pole Max. 15A,
5 Pole Max. 10A.
- * Operating Temperature: $-40^{\circ} \sim +105^{\circ}$.
- * Gland Pipe Recommended Tightening Torque:
8~10 Kgf.cm(0.78~0.98 N.m)
- * Gland Nut Recommended Tightening Torque:
8~10 Kgf.cm(0.78~0.98 N.m)
- * Seal For Cable OD: $\varnothing 4.5 \sim \varnothing 6.5\text{mm}$, Blue.
 $\varnothing 6.5 \sim \varnothing 8.5\text{mm}$, Yellow.
 $\varnothing 8.5 \sim \varnothing 10.5\text{mm}$, Green .
 $\varnothing 10.5 \sim \varnothing 12.5\text{mm}$, Red.
- * Screws for Wire connection recommended tightening
torque: 2.00~4.50kgf.cm / 0.196~0.44 N.m
- * Applicable Wire gauge: 2~4 Pole: 18AWG ~ 12AWG
5 Pole: 20AWG ~ 16AWG
- * UL2238 Certification

UNIT:mm



TOLERANCE

 $\pm 0.5\text{mm}$

TITLE

ULT2 Cable Joiner
Screw-in Type

SCALE: 67:100

SIZE: A4

SHEET 2 OF 2

REV. D

WC-REV. .0

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

SC-L-ULT2-XX-XX

ALTW

DRAWN BY

CHECKED BY

APPROVED BY

Peng

Mafei

Jerry

DATE

DATE

DATE

2019-03-02

2019-03-02

2019-03-02