



Passive Components > Inductors > High Frequency & RF Inductors



Inductor Type: **Radio Frequency**
Inductance: **33 μ H**
Current Rating (Max): **228 mA**
DC Resistance: **3.4 Ω**
Inductor Quality Factor: **45**

Features

Product Type Features

Inductor Type	Radio Frequency
Element Type	Wire Wound

Electrical Characteristics

Self Resonant Frequency	.024 GHz
Inductance	33 μ H
Current Rating (Max)	228 mA
DC Resistance	3.4 Ω
Passive Component Tolerance	10 %

Body Features

Lead Type	Axial-Leaded
-----------	--------------

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Dimensions

Product Diameter	2.8 mm[.11 in]
Product Length	7 mm[.275 in]

Usage Conditions

Operating Temperature Range	-55 – 100 $^{\circ}$ C[-67 – 212 $^{\circ}$ F]
-----------------------------	--



Packaging Features

Packaging Method	Ammo Packed
------------------	-------------

Other

Inductor Quality Factor	45
-------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1623953-2 SC10-10-0543-10 330UH AMMO 1000	 TE Part # 1623938-1 SC10-10-0537-10 100UH AMMO 1000	 TE Part # 1624044-2 SC30-10-2501-10 0.1UH AMMO 1000	 TE Part # 1624002-3 SC30-10-2549-10 1000UH AMMO 1000
---	---	---	--





TE Part # 1623944-1
SC10-10-0513-10 1UH AMMO 1000



TE Part # 1623990-1
SC15-10-1037-10 47UH AMMO 1000



TE Part # 1623937-4
SC10-10-0525-05 10UH AMMO 500



TE Part # 1624056-4
SC55-10-3956-10 2.2UH



TE Part # 1624001-3
SC30-10-2537-10 100UH AMMO 1000



TE Part # 1624011-1
SC30-10-2515-10 1.5UH AMMO 1000



TE Part # 1624028-1
SC30-10-2534-10 56UH AMMO 1000



TE Part # 1624035-1
SC30-10-2548-10 820UH AMMO 1000



TE Part # 1624036-1
SC30-10-2524-10 8.2UH AMMO 1000



TE Part # 1624032-1
SC30-10-2547-10 680UH AMMO 1000



TE Part # 1624045-2
SC30-10-2502-10 0.12UH AMMO 1000



TE Part # 1623939-2
SC10-10-0549-10 1000UH AMMO 1000



TE Part # 1624031-1
SC30-10-2535-10 68UH AMMO 1000



TE Part # 6-1624055-0
SC0914 47UH 10%




TE Part # 1623950-2
SC10-10-0517-10 2.2UH AMMO 1000



TE Part # 1623991-1
SC15-10-1021-10 4.7UH AMMO 1000

Also in the Series | [Sigma SC](#)

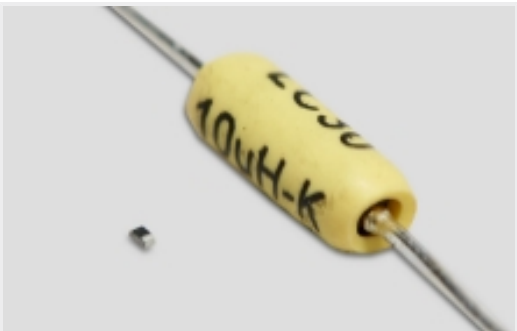

High Frequency & RF Inductors(78)



LC Connectors(3)




Printable Tubing(9)




SC Connectors(5)


Customers Also Bought

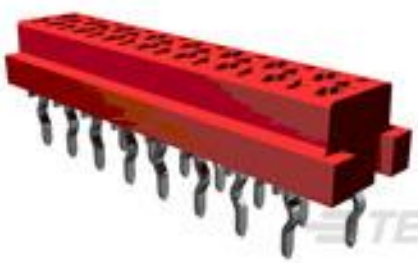


TE Part #1-215079-2
MICRO-MATCH FOB.12P

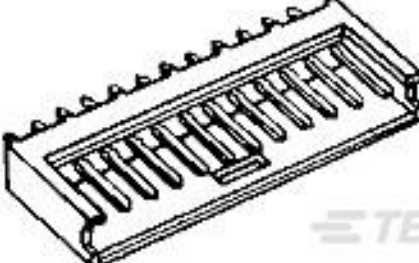

TE Part #280372-2
6P AMPMODU II SHRD HDR, ST, 0.38 AU

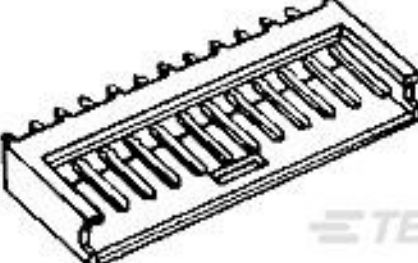

TE Part #280373-1
8P AMPMODU II SHRD HDR, ST, TIN

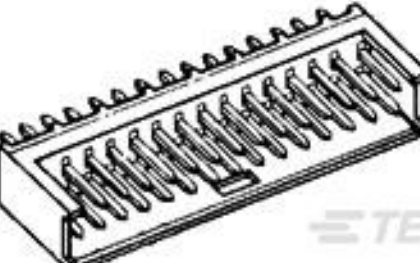

TE Part #280521-1
2X12P AMPMODU II SHRD HDR, ST, TIN



TE Part #1461402-6
OJE-SH-112HM,000



TE Part #1571999-1
ADP0204=PIANO DIP SWITCH



TE Part #3-1623732-9
BCHE 7 W 47R 5%



TE Part #1624013-4
SC30-10-2529-10 22UH AMMO 1000



TE Part #1-1676480-3
CRG0402 1% 150K



TE Part #2176230-1
3522 0R0 5% 3W

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1624019-2_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1624019-2_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1624019-2_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1309350_PASSIVE_COMPONENT

English

Axial Leaded Power Inductors - Type SC10, SC15, SC30 Series - Tyco Electronics Passives

English

SC30330KT

33 μ H, Radio Frequency Inductor, 228 mA, 3.4 ohm DC Resistance, 10 %, Through Hole - Solder, Axial-Leaded, Ammo Packed, Sigma SC

