
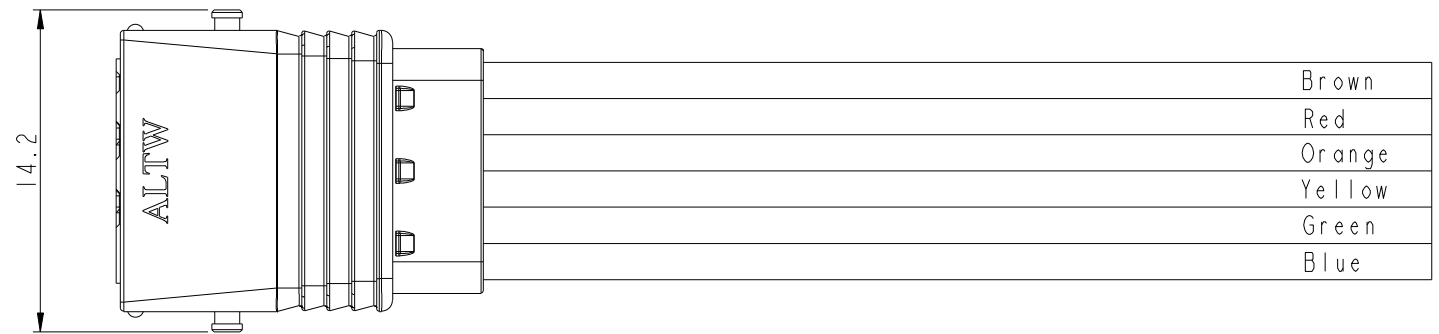
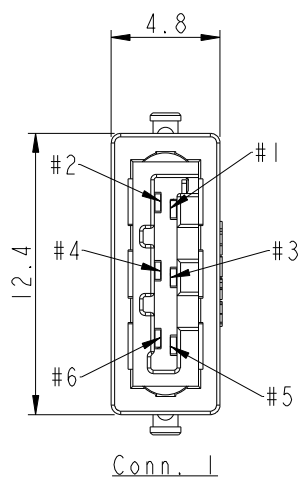
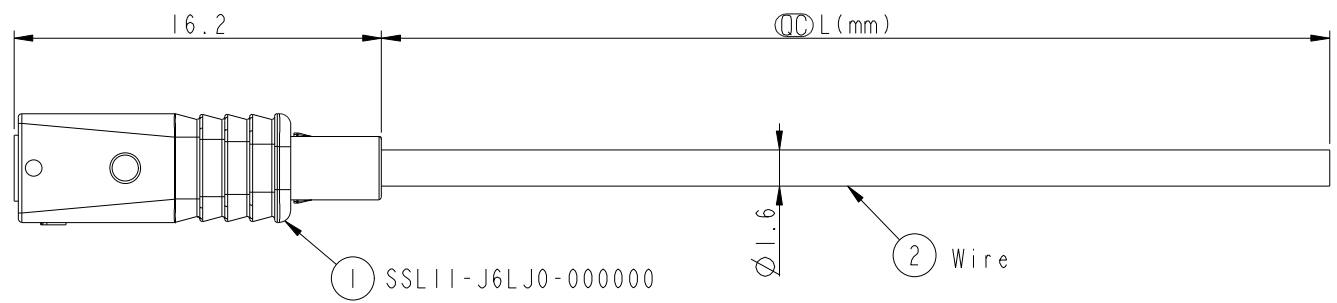


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-02-08	Fisher	Initial Release




Brown
Red
Orange
Yellow
Green
Blue

6	Blue	藍
5	Green	綠
4	Yellow	黃
3	Orange	橙
2	Red	紅
1	Brown	棕
Conn. 1	Wire Color	
Pin Out		

SSL11-J6LJ0-022AXX

- 01: L=100±20 mm.
- 02: L=200±20 mm.
- 04: L=400±25 mm.
- Standard Length is 400mm
- Wire Length Range(L): 100~9900mm
- 22: 22AWG
- LOCK&LATCH OPTION
- 0: W/O LOCK



Notes:
* (QC) Important Dimensions To Check.
* Housing: Thermoplastic, UL94V-0, Natural White.
* Terminal: Copper Alloy, Gold Plated.
* Hood: Thermoplastic, UL94V-0, Natural White.
* SR Mold: PP, UL94V-0, Natural White.
* Wire: UL1430 22AWG, Brown/Red/Orange/Yellow/Green/Blue.
* Wire Length Tolerance: ±5%mm.

UNIT:mm		TITLE
TOLERANCE		SSL11 WIRE ASS'Y, W/O LOCK
.X ±0.25		6-POS, JACK TO OPEN
.XX ±0.1		
.XXX ±0.05		
ANGLES ±1°		
SCALE	3:1	SIZE A4
REV.	A	WC-REV. A.6
QC: Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	SSL11-J6LJ0-022AXX	Fisher_Wang
CUSTOMER	ALTW	Ivan_Lin
APPROVED BY	Kevin_Hu	2014-02-08