





	1	2	3	4	5	6	7	8	
					REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					C	LEN1790247	2017-09-14	Ruru	RoHS Label and blue and white label merger
					D	C220940	2022-06-22	Ruru	 X3
					E	C231462	2023-11-15	Ruru	 X1

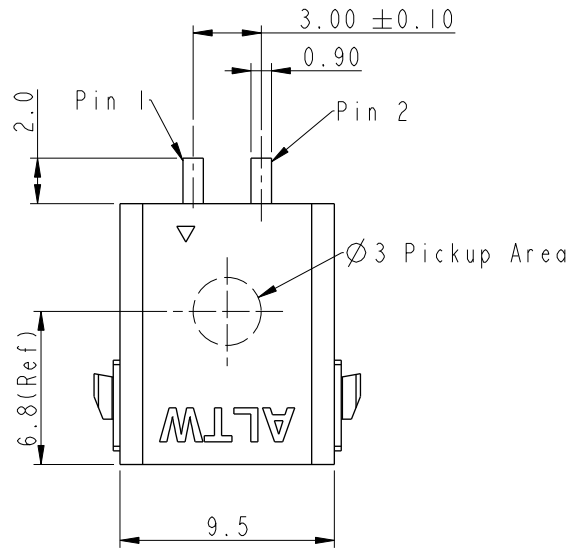


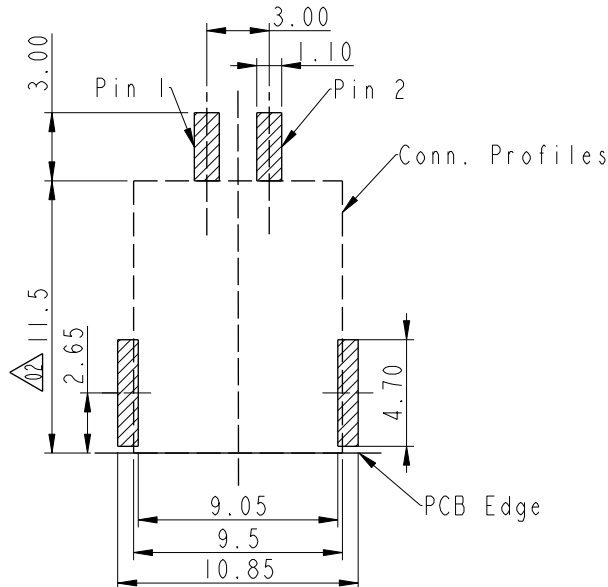

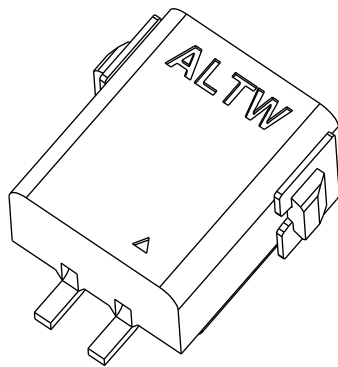

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE IS ±0.05

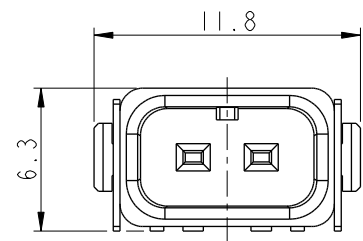



Notes:

- *  Important Dimension To Check.
- * Waterproof Rate: IP68(mating)
1M Depth Of Water In 24 Hours.
- * Housing: High temperature thermoplastic.
UL94V-0, color is natural white.
- * Terminal: Copper Alloy,Gold plated on contact area.
- * Solder Peg: Copper Alloy,Tin plated over Nickel.
- * Current Rating: 5A maximum.
-  * Voltage Rating: 250V DC/AC maximum.
- * Operating Temperature: -40~+105℃

UNIT:mm			TITLE	SSL, 1.2 WP, F, 2P SMT R/A W/O POST, NONE 	Amphenol LTW	ITEM NO	SSL12-J2D00-000001	DRAWN BY	Ruru	DATE	2023-11-15	
TOLERANCE	±0.5mm		SCALE	3:1	SIZE	A4	SHEET	1	OF	2		
REV.	E		WC-REV.	A.6	 Inspection item	安費諾亮泰企業股份有限公司	DWG NO	SSL12-J2D00-000001	CHECKED BY	Rita	DATE	2023-11-15
							CUSTOMER	ALTW	APPROVED BY	Fred	DATE	2023-11-15

1

2

3

4

5


6

7

8

W10814-03-BW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


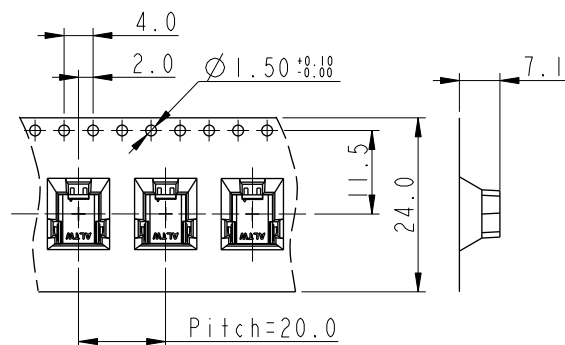


MATERIALS




1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

QUANTITY

1. 450Pcs Per Reel
2. 8 Reel Per Carton (3600Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 2.7Kg/Carton
5. Gross Weight: 7.9Kg/Carton

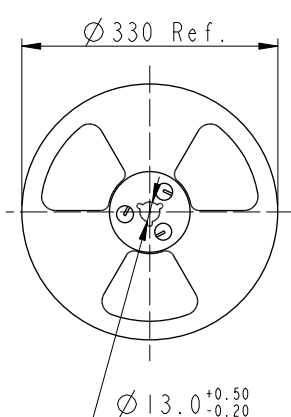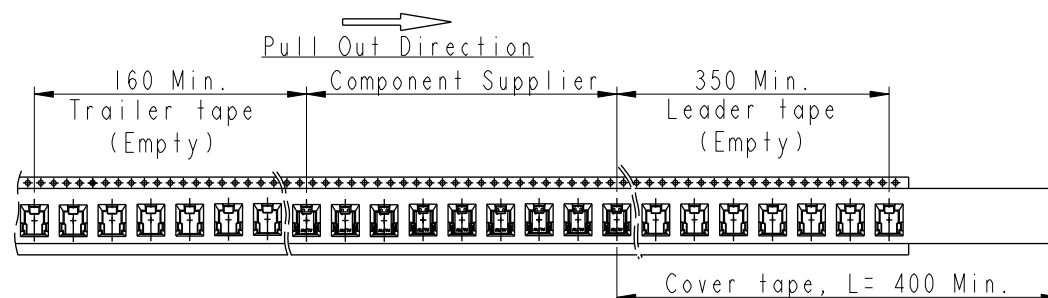

Reel For Carrier Tape

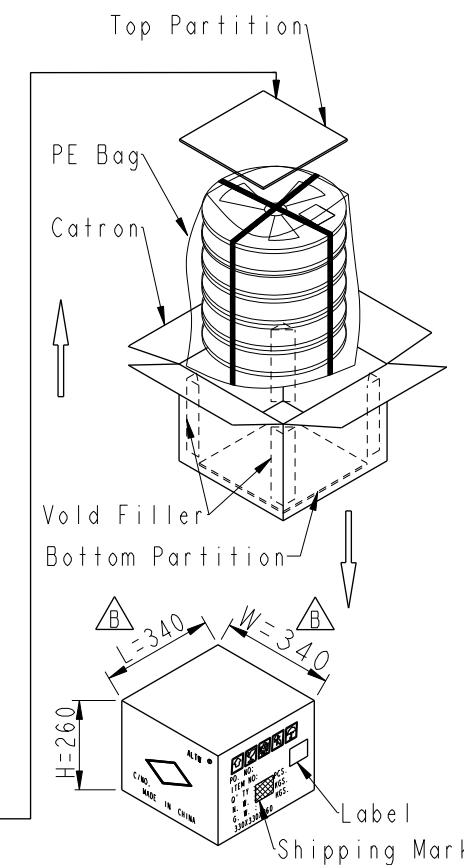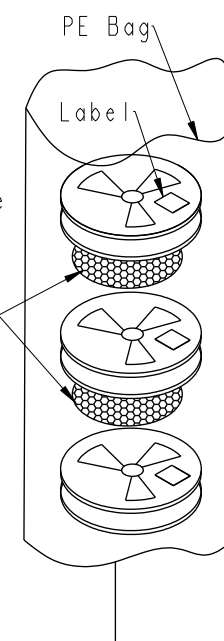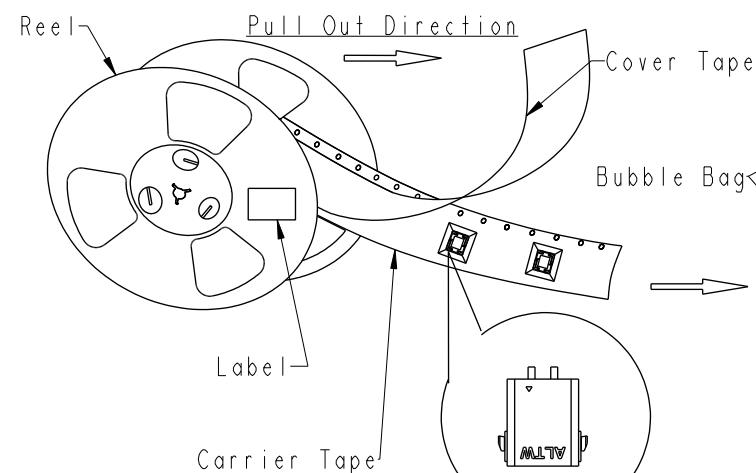

UNIT:mm
TOLERANCE
±0.5mm

TITLE
SSL, 1.2 WP, F, 2P
SMT R/A W/O POST, NONE
SCALE 3:1
SIZE A4
SHEET 2 OF 2
REV. E
WC-REV. A.6
QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO
SSL12-J2D00-000001
DWG NO
SSL12-J2D00-000001
CUSTOMER
ALTW

DRAWN BY
Ruru
CHECKED BY
Rita
APPROVED BY
Fred

DATE
2023-11-15
DATE
2023-11-15
DATE
2023-11-15