
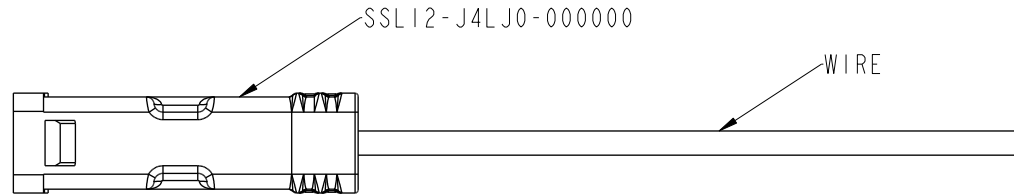
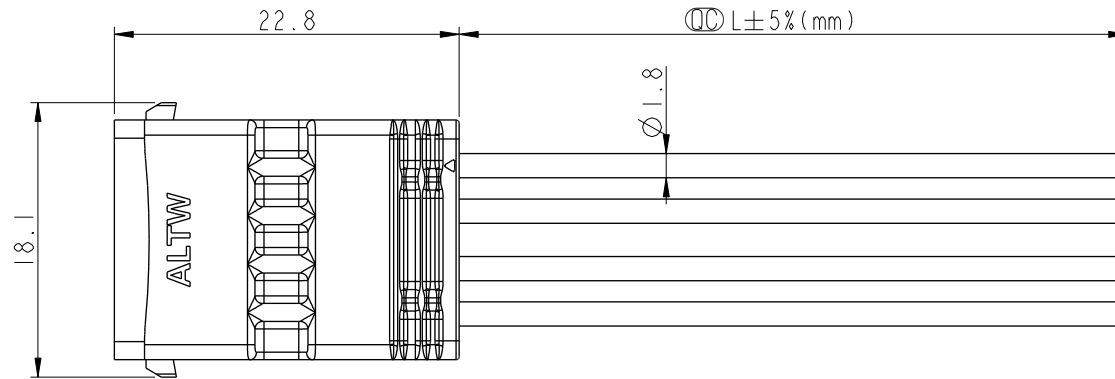


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1790240~41	2017-09-14	Ruru	RoHS Label and blue and white label merger
D	C200559	2020-05-05	NianPing Yu	 X1
E	C220940	2022-06-23	Ruru	 X3

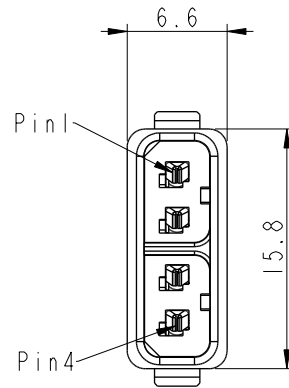

SSL12-J4LJ0-020AXX

- 01: $L=100\pm 20\text{mm}$
 02: $L=200\pm 20\text{mm}$
 04: $L=400\pm 25\text{mm}$
 Wire Length Range(L): 100~9900mm
 -20: 20AWG


4	Yellow 黃
3	Orange 橙
2	Red 紅
1	Brown 棕
Conn.	Wire
Pin-out	

Notes:



- *  Important Dimension To Check.
- * Waterproof Rate: IP68(mating)
1M Depth Of Water In 24 Hours.
- * Housing: Thermoplastic, UL94V-0, Natural White.
- * Terminal: Copper Alloy, Gold Plated on contact area.
- * Seals: Silicone, Gray.
- * Wire: UL1430 20AWG.
- * Current Rating : 5A maximum.
- * Voltage Rating: 250V DC/AC maximum.
- * Operating Temperature: -40~+105°C.

UNIT: mm			TITLE SSL, 1.2 WP, F, 4P CABLE S W/SR, NONE 			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO		DRAWN BY Ruru		DATE 2017-09-14	
TOLERANCE ±0.5mm			SCALE 1:1	SIZE A4	SHEET 1 OF 2		DWG NO SSL12-J4LJ0-020AXX	CHECKED BY Rita		DATE 2017-09-14		
			REV. E	WC-REV. A.6	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Max		DATE 2017-09-14		


PACKAGE

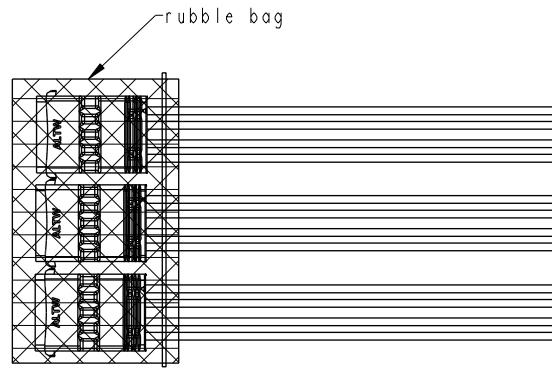

10pcs connector put on rubble bag, and with a cable ties.

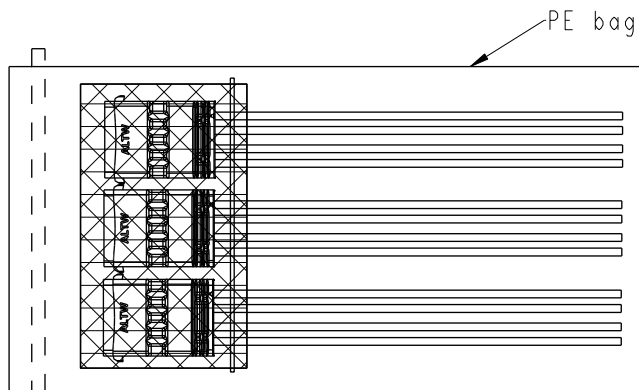

100 Pcs Cable into a PE Bag

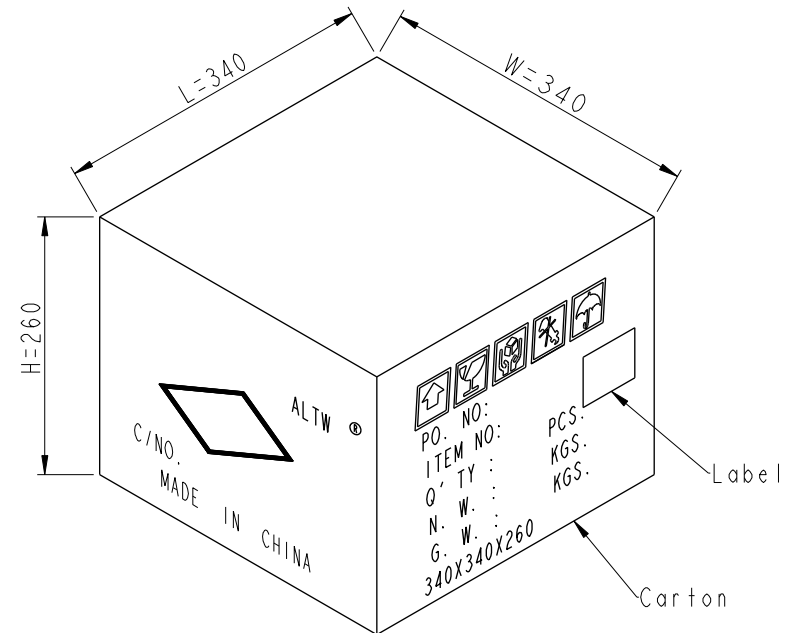

500pcs per Carton

UNIT:mm		TITLE SSL, 1.2 WP, F, 4P CABLE S W/SR, NONE SCALE 1:1 REV. E SIZE A4 WC-REV. A.5 SHEET 2 OF 2 QC: Inspection item	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO DWG NO CUSTOMER	DRAWN BY CHECKED BY APPROVED BY	DATE DATE DATE
TOLERANCE	±0.5mm			ALTW	Ruru	2017-09-14
					Rita	2017-09-14
					Max	2017-09-14