

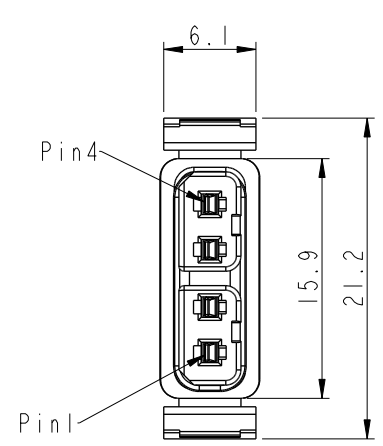


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1790242~43	2017-09-14	Ruru	RoHS Label and blue and white label merger
D	C200559	2021-12-22	Kyle Huang	 X1
E	C220940	2022-06-24	Ruru	 X3

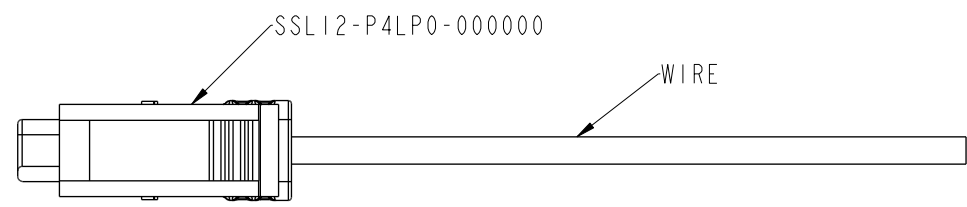

Conn.

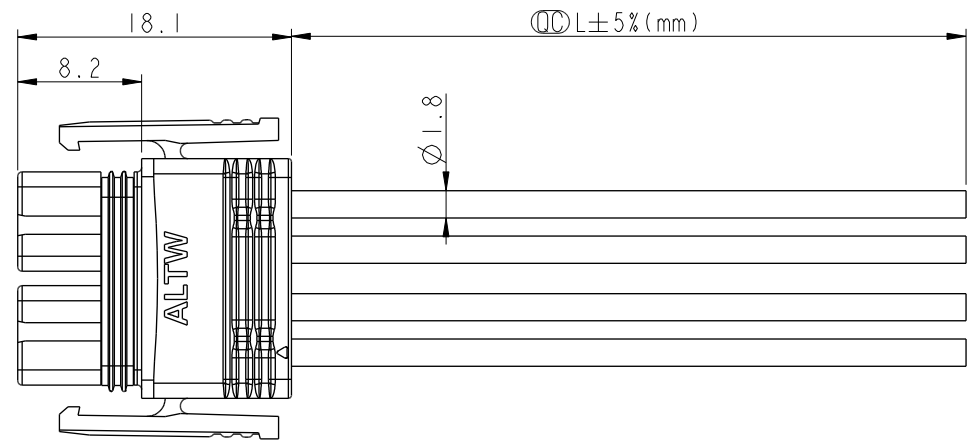

SSL12-P4LP0-M20AXX

- 01: L=100±20mm
- 02: L=200±20mm
- 04: L=400±25mm
- Wire Length Range(L): 100~9900mm
- 20: 20AWG

- Notes:
- *  Important Dimension To Check.
 - * Waterphooof Rate: IP68(mating).
IM Depth Of Water In 24 Hours.
 - * Housing: Thermoplastic, UL94V-0, Natural White.
 - * Terminal: Copper Alloy,Gold Plated on contact area.
 - * Gasket: Silicone, Gray.
 - * Seals: Silicone, Gray.
 - * Wire: UL1430 20AWG.
 - * Current Rating : 5A maximum.
 - * Voltage Rating: 250V DC/AC maximum.
 - * Operating Temperature: -40~+105°C.


4	Yellow 黃
3	Orange 橙
2	Red 紅
1	Brown 棕
Conn.	Wire
Pin-out	

UNIT:mm			TITLE SSL, 1.2 WP, M, 4P CABLE S W/SR, W/2 LATCH(1.2) 		
TOLERANCE ±0.5mm			SCALE 1:1	SIZE A4	SHEET 1 OF 2
REV. E	WC-REV. A.7	 :Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司


ITEM NO	DRAWN BY Ruru	DATE 2017-09-14
DWG NO SSL12-P4LP0-M20AXX	CHECKED BY Rita	DATE 2017-09-14
CUSTOMER ALTW	APPROVED BY Max	DATE 2017-09-14

PACKAGE

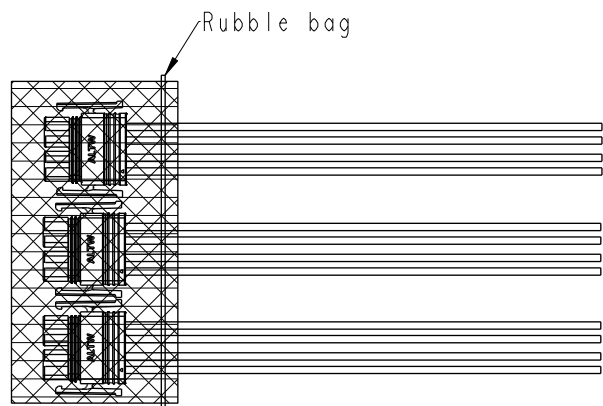


Rubble bag

10pcs connector put on rubble bag, and with a cable ties.

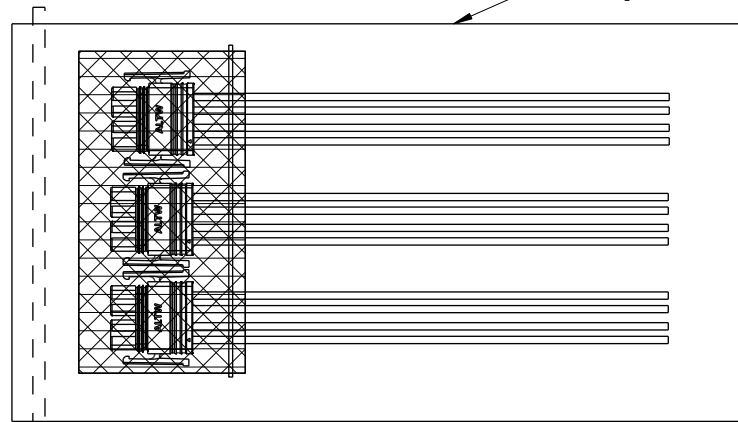

PE bag

100 Pcs Cable into a PE Bag

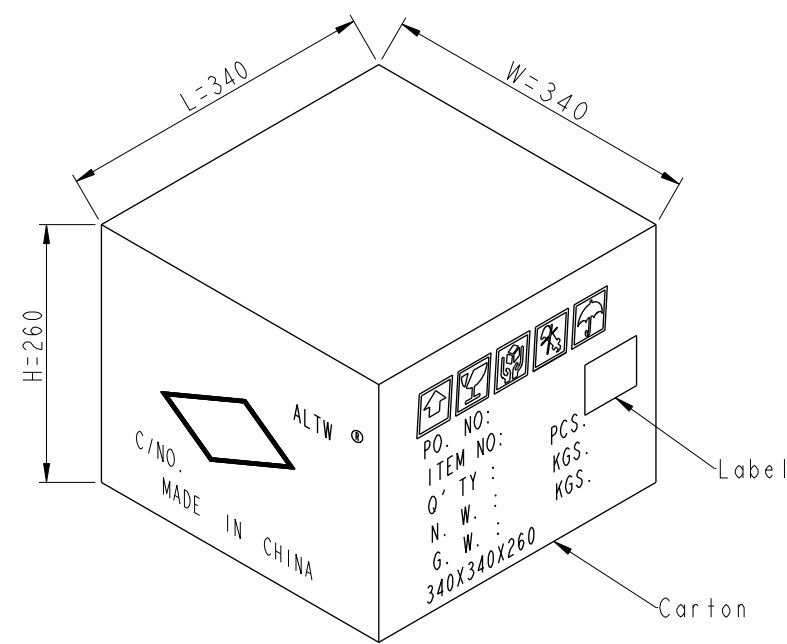

500pcs per Carton

UNIT:mm		TITLE	
TOLERANCE		SSL, 1.2 WP, M, 4P	
±0.5mm		CABLE S W/SR, W/2 LATCH(1.2)	
SCALE	SIZE	SHEET	OF
1:1	A4	2	2
REV.	WC-REV.	QC:Inspection item	
E	A.7		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2017-09-14
DWG NO	CHECKED BY	DATE
SSL12-P4LP0-M20AXX	Rita	2017-09-14
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017-09-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.