




Connectors > D-Shaped Connectors > NANONICS DUALOBE Connector: Receptacle, Metal Shell

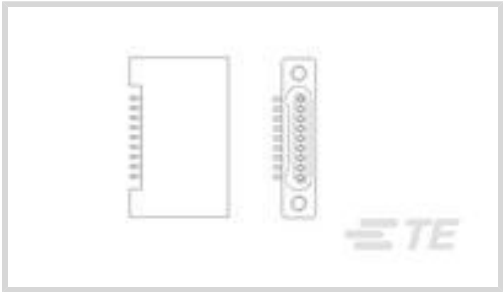

Number of Positions: 5

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Connector Mounting Type: **Board Mount**

Centerline (Pitch): **.64 mm [.025 in]**

[All NANONICS DUALOBE Connector: Receptacle, Metal Shell \(21\)](#)

Features

Product Type Features

Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	5

Contact Features

Contact Mating Area Plating Material	Tin-Lead
Contact Type	Socket
Contact Base Material	Beryllium Copper
Contact Current Rating (Max)	1 A
Contact Options	Installed

Termination Features

Termination Method to PCB	Surface Mount
Termination Method to Wire & Cable	Preterminated Flying Leads



Mechanical Attachment

Connector Mounting Type	Board Mount
Mounting Hardware	Screw

Housing Features

Housing Material	Aluminum
Centerline (Pitch)	.64 mm [.025 in]

Usage Conditions

Operating Temperature Range	-200 – 200 °C [-328 – 392 °F]
-----------------------------	-------------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (40% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1589666-5

[302-0009-02 = CLEADFRAME](#)

Customers Also Bought

TE Part #5745563-3

[HD KIT,SCREWLOCK](#)

Documents

Product Drawings

[SSM005L82AQ = SMT Conn](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1589467-8_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1589467-8_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1589467-8_A.3d_stp.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1589467 Nanonics Cross Reference](#)

SSM005L82AQ

5 Position, Receptacle, Wire-to-Board, Board Mount, .64 mm [.025 in] Centerline,
Printed Circuit Board, Power & Signal, -200 – 200 °C [-328 – 392 °F]



English