

TDC10



Designed to British Standard BS2950A

Breaking Capacity: 10 times rated current @ rated voltage


Order Code: TDC10 + -Rating
 Type: Fast Acting
 Size: 6.3 x 32mm
 Construction: Glass Tube, electro-plated brass end caps
 Ratings: 50mA to 25A
 Packing: Bulk quantities only

Rating	Rated Voltage V ac	Rating	Rated Voltage V ac
50mA	1000	2A	250
60mA		3A	
100mA		5A	
150mA		7A	150
250mA		10A	100
500mA	750	12A	32
750mA	500	15A	
1A	350	20A	
1.5A	250	25A	

C387

Ordering Code: C387 + Rating
 Type: Fast Acting
 Construction: Glass Tube with electro-plated brass end caps
 Ratings: 50mA to 25A
 Rated Voltage: 50mA to 6.3A - 250V
 8A & 10A - 100V
 12A - 25A 32V

Dimensions (mm):

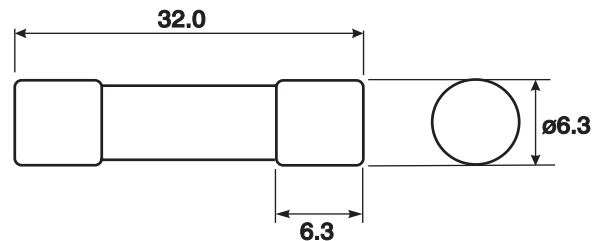

Performance Data:

Rated Current	I_n		$2.0I_n$	
	Min	Max	Min	Max
Total Operating Time	1000 hours	-	-	10 seconds

Breaking Capacity: $10I_n$ at rated voltage or 63A whichever is greater

Available Ratings

Rating	Rated Voltage V ac	Rating	Rated Voltage V ac	Rating	Rated Voltage V ac
50mA	250	500mA	250	5A	250
63mA		630mA		6.3A	
80mA		800mA		8A	100
100mA		1A		10A	
125mA		1.25A		12A	32
160mA		1.6A		15A	
200mA		2A		16A	
250mA		2.5A		20A	
315mA		3.15A		25A	
400mA		4A			