


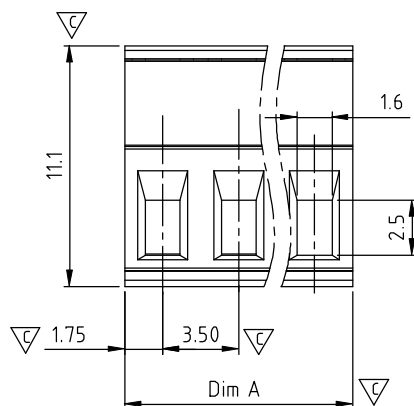

TJ xx 11 x 3 xxxx G 

02 2 CONTACTS ←

03 3 CONTACTS

... ..

24 24 CONTACTS

Color

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

9 White(RAL1102)

 C Green(RAL6018/U)


G RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo

000A Standard ANY Logo

0091 Standard ANY Logo

Any special item by
customer request,
please contact sales
department.

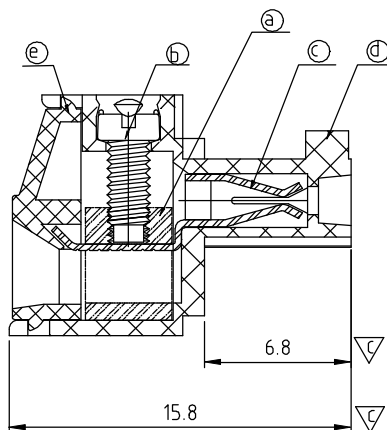

N = Number of poles
Dim A = $N \times 3.5$
Dim B = $(N - 1) \times 3.5$

Poles	Dim A	Dim B
2p-6p	± 0.15	± 0.15
7p-12p	± 0.20	± 0.20
13p-18p	± 0.25	± 0.25
19p-24p	± 0.30	± 0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	11/01'05	Electrical standard changed.	Marvin
△	04/20'06	2p to 6p with wedge is changed.	Marvin
△	8/13'06	Added VDE standard	梁仁松
△	10/30'06	Part No. is changed	Marvin
△	07/09`10	The solid and Stranded wire are changed from16-26 to16-28	Chen Bo
△	07/09`10	Rmmove the CSA mark	Chen Bo
△	08/12`13	update the drawing	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating “-” slot type
- Item c Female contact: PhBz ,Tin plated
- Item d Terminal (housing): PA66 (UL94 V-0)
- Item e Terminal cover:PA66 (UL94V-0)

 Electrical cULus/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 10A/10.5A
- Wire range: 15mm²
- Solid wire(AWG): 16-28
- Stranded wire(AWG): 16-28
- Torque: 3Lb-In/0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 
- Critical dimension: 

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ-3.5mm Series 2p-24p					
PART NO.		TJxx11x3xxxxG		DWG NO.		8TJ0501	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 08/12`13	Chen Bo 08/12`13		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV: H		X.XX ±0.10
							X° ±1°