

TXR54AB00-1004AI

✓ ACTIVE

RAYCHEM | RAYCHEM TXR

TE Internal #: 902654-000

Ruggedized, Backshell, .2 – 6.4 mm [.01 – .25 in] Cable Entry,
Aluminum, Straight, 10 Shell Size, RAYCHEM TXR

[View on TE.com >](#)



Connectors > Connector Accessories > Connector Backshells



Connector Backshell Product Style: **Ruggedized**
Connector Backshell Product Type: **Backshell**
Cable Entry Diameter: **.2 – 6.4 mm [.01 – .25 in]**
Primary Product Material: **Aluminum**
Body Orientation: **Straight**

Features

Product Type Features

Termination Device Included	TR04AI
Connector Backshell Product Style	Ruggedized
Connector Backshell Product Type	Backshell
Termination Device Type	Side-Entry Tinel-Lock Ring, Tinel-Lock Adapter, Tinel-Lock Ring

Body Features

Primary Product Color	Olive Drab
Primary Product Material	Aluminum
Primary Product Plating Material	Cadmium (AMS-QQ-P-416, Type II, Class 3)

Housing Features

Body Orientation	Straight
Compatible With Connector Shape	Circular

Dimensions

Product Length	25.5 mm[1 in]
Compatible Cable Diameter Range	3.2 – 5.1 mm[.125 – .2 in]
Cable Entry Diameter	.2 – 6.4 mm[.01 – .25 in]

Usage Conditions

Salt Spray Resistance	500 Hr
-----------------------	--------



Operating Temperature Range

-65 – 175 °C[-85 – 347 °F]

Operation/Application

Compatible With Connector Shell Size	10
--------------------------------------	----

Industry Standards

Connector Detail Specification Number	AS34001, AS34011, AS34041, AS34061, AS34081, AS34091, AS34121, AS34241, AS34461, AS34501, AS34511, AS34541, AS34561, AS34641, AS34671, AS34681, M83723/01, M83723/02, M83723/03, M83723/04, M83723/05, M83723/06, M83723/07, M83723/08, M83723/13, M83723/14, M83723/36, M83723/37, M83723/38, M83723/39, M83723/40, M83723/41, M83723/42, M83723/43, M83723/48, M83723/49, M83723/65, M83723/66, M83723/67, M83723/68, M83723/69, M83723/71, M83723/72, M83723/73, M83723/74, M83723/75, M83723/76, M83723/77, M83723/78, M83723/82, M83723/83, M83723/84, M83723/85, M83723/86, M83723/87, M83723/91, M83723/92, M83723/95, M83723/96, M83723/97, M83723/98, MS3459, MS3470, MS3471, MS3472, MS3474, MS3475, MS3476, NAS 1599, NAS 1641, NAS 1642, NAS 1643, NAS 1650, NAS 1651, NAS 1652, NAS 1653, NAS 1692, NAS 1693, NAS 1694, NAS 1699, NAS 1700, NAS 1701, NAS 1702
---------------------------------------	---

Other

TE Connector Interface Code	54
-----------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Cd (100% in 10563731072)



Pb (.4% in 3435324)

Article Safe Usage Statements:
Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 173643-000
RH-3960-1-TINEL-KIT-120V

Also in the Series | RAYCHEM TXR

Circular Connector Backshells & Clamps(2016)

Connector Backshells(2016)

Ruggedized Backshells & Adapters (2016)

Customers Also Bought

TXR54AB00-1004AI

Ruggedized, Backshell, .2 – 6.4 mm [.01 – .25 in] Cable Entry, Aluminum, Straight, 10 Shell Size, RAYCHEM TXR







TE Part #YDIV43E23-35SBV001
RECP ASSY




TE Part #YDIV43E15-35PNV001
RECP ASSY

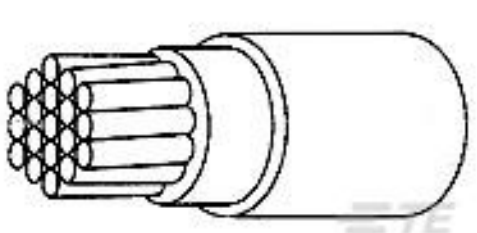


TE Part #9922713001
100G0111-0.40-0



TE Part #491147-000
TXR41AB90-1607BI

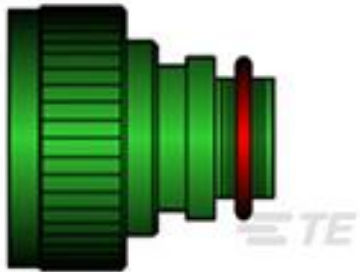

TE Part #495693-000
TXR41AB00-1410BI

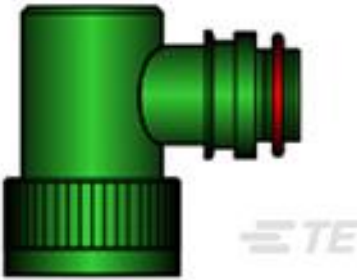

TE Part #531975-000
TXR41AB90-1404BI



TE Part #3-1879354-1
RR03 5% 5R6 AMMO



TE Part #5-1879354-3
RR03 5% 47R AMMO



TE Part #YDIV44E13-35SCC009
RECP ASSY



TE Part #YDIV44E13-98SBC009
RECP ASSY

Documents

Product Drawings
TXR54AB00-1004AI

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_902654-000_O.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_902654-000_O.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_902654-000_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



5-1654025-5_sec6_Adapters

English

MATERIAL AND FINISH DETAILS

English

Circular Backshells

English

Product Specifications

General Information Package for Tinel-Lock Adapters

English

Product Specification

English

Braid termination using a Tinel Lock Ring installed using a resistance heater.

French

Braid termination using a Tinel Lock Ring installed using a resistance heater.

English

PERFORMANCE SPECIFICATION Tinel-Lock Rings, Heat Recoverable for Braid Termination

English

ASSEMBLY GUIDE for Tinel -Lock Rings, Heat Recoverable for Braid Temination

English

Instruction Sheets

Instruction Sheet (U.S.)

English