



Relays & Contactors > Electromechanical Relays > Small Signal Relay, Axicom P2 Standard



Relay & Contactor Type: **General Purpose Signal Relay**

Coil Magnetic System: **Polarized, Monostable**

Contact Arrangement: **2 Form C DPDT-CO**

Current Type: **DC**

Contact Current Rating: **2 A**

[All Small Signal Relay, Axicom P2 Standard \(23\)](#)

Features

Product Type Features

Relay & Contactor Type	General Purpose Signal Relay
------------------------	------------------------------

Configuration Features

Contact Special Features	Bifurcated/Twin Contacts, Long Terminals
Relay Options	Power Switching
Contact Number of Poles	2
Coil Special Features	Overmolded Coil
Contact Arrangement	2 Form C DPDT-CO

Electrical Characteristics

Contact Limiting Short-Time Current	2 A
Contact Limiting Making Current	2 A
Contact Limiting Continuous Current	2 A
Contact Limiting Breaking Current	2 A



Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Contact Switching Voltage (Max)	250 VAC
Contact Switching Load (Min)	10mA @ .2V
Voltage Standing Wave Ration (HF Parameter)	1.04db @ 100MHz, 1.4dB @ 900MHz
Coil Resistance	178 Ω
Insulation Initial Resistance	1000 MΩ
Contact Current Rating	2 A
Coil Voltage Rating	5 VDC
Contact Voltage Rating	220 VDC
Coil Power Rating DC	.14 W
Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms

Body Features

Product Weight	2.8 g[.0988 oz]
Enclosure Type	Flux Resistant Automatic Solder Capable & Washable

Contact Features

Contact Plating Material	Gold
Contact Material	AgNi

Termination Features

Main Termination & Connection Type	PCB SMT
Coil Termination & Connection Type	PCB SMT

Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

Dimensions

Insulation Clearance Between Contact & Coil	1.3 mm[.051 in]
Insulation Creepage Between Contact & Coil	2.5 mm[.098 in]
Product Width	7.2 mm[.283 in]
Product Length	14.6 mm[.574 in]
Product Height	9.9 mm[.389 in]

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------



Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	85 °C[185 °F]

Operation/Application

Solder Process	Reflow Solder Capable
Coil Magnetic System	Polarized, Monostable
Current Type	DC

Packaging Features

Packaging Method	Reel
------------------	------

Other

Coil Power Rating Class	≤.15 W
Contact Current Class	≤2 A
Height Class (Mechanical)	>7 – ≤11 mm[>.276 – ≤.433 in]
Length Class (Mechanical)	>11 – ≤16 mm[>.433 – ≤.63 in]
Width Class (Mechanical)	>7 – ≤11 mm[>.276 – ≤.433 in]

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 4-1422008-5
[V23079C2101B301](#)

TE Part # 3-1393790-2
[V23079A2001X103](#)

TE Part # 4-1393789-9
[V23079G2001B301](#)

Also in the Series | [Axicom P2 Signal Relay](#)

[PCB Relays\(44\)](#)

Customers Also Bought

TE Part #5000638-F
[LDES050BF6S](#); PRES; 50Pa;0,5...4,5V;
5Vs

TE Part #10220685-00
[CHPG-100K](#) +/- 2% B 4075 +/- 1%
BT63-H

TE Part #1422006-4
[V23079G2003X074](#)


TE Part #8-1614884-0
[CPF 0805 6K8 0.1% 25PPM 1K RL](#)

TE Part #1775073-1
[SHIELD FINGER 434025N7](#)

TE Part #1969809-1
[05P UMNL PIN HDR ASSY, PIN RA V0](#)
GW

TE Part #1-2176418-1
[TLRF 1206 1.0W R030 1% 50PPM 5K RL](#)

TE Part #GA23K3CG595
[CHPC-TAIWAN GOLD CHIP](#)

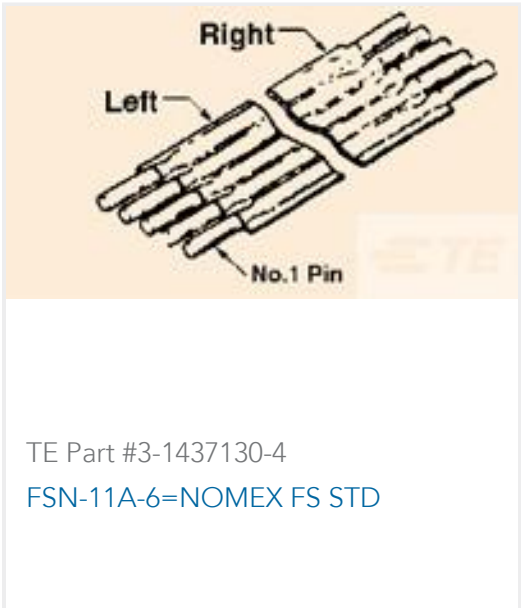

Documents

Product Drawings

V23079D2001B301

English

CAD Files

Customer View Model

ENG_CVM_CVM_1393789-4_O.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393789-4_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393789-4_O.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-1393789-3_E1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-1393789-3_E1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-1393789-3_E1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

Axicom Signal and High Frequency Relays (RF Switches) APPLICATION NOTE #2

English

Transportation, Storage, Handling, Assembly and Testing of AXICOM SMT Relays

English

P2 Relay Datasheet



English

[Product Specifications](#)
[Definitions](#) [General Purpose Relays](#)

English

[Agency Approvals](#)
[UL](#)

English