


VLS3015ET-4R7M

Applications		Commercial Grade
Feature		Wire Wound
		Magnetic Shield
		Ferrite Core
Series	VLS-E Series / VLS3015E Type	
Status	Production	

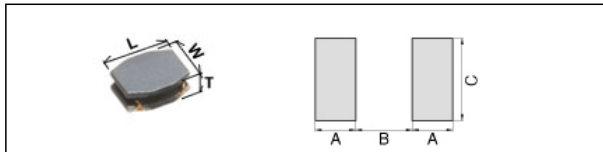


Size	
Length(L)	3.00mm +/-0.10mm
Width(W)	3.00mm +/-0.10mm
Thickness(T)	1.50mm Max.
Recommended Land Pattern (A)	1.00mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	3.00mm Nom.

Electrical Characteristics	
Inductance	4.7uH +/-20% at 1MHz
Rated Current (L Change) [Typ.]	1.1A (30% Down)
Rated Current (L Change) [Max.]	1A (30% Down)
Rated Current (Temperature Rise) [Typ.]	1.35A (40degC Rise)
DC Resistance [Nom.]	113mΩ
DC Resistance [Max.]	136mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.
Weight	0.052g

VLS3015ET-4R7M


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

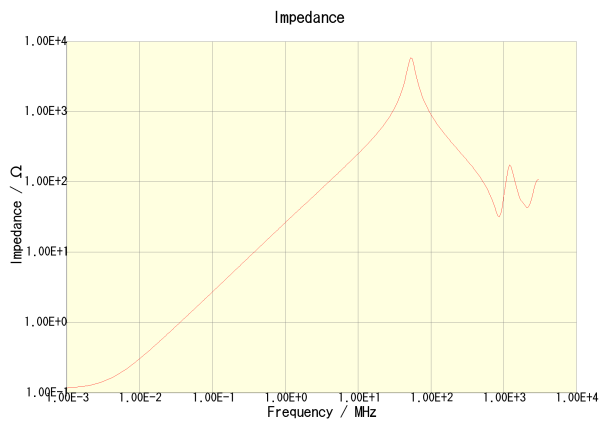


VLS3015ET-4R7M

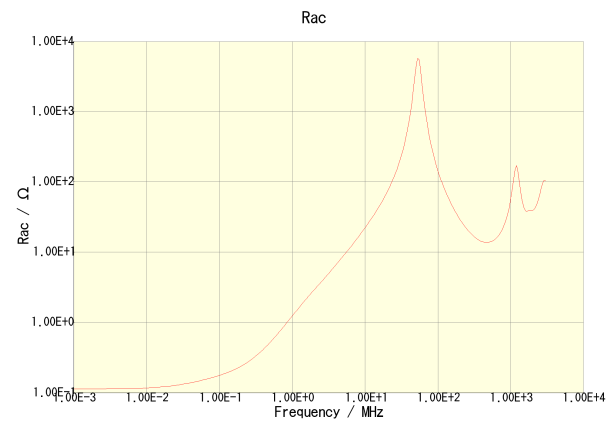

VLS3015ET-4R7M

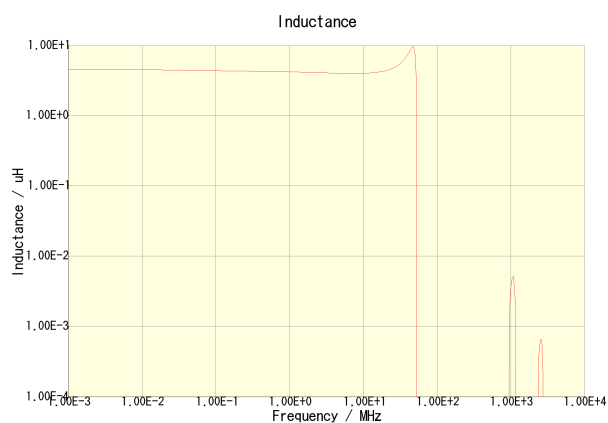


VLS3015ET-4R7M

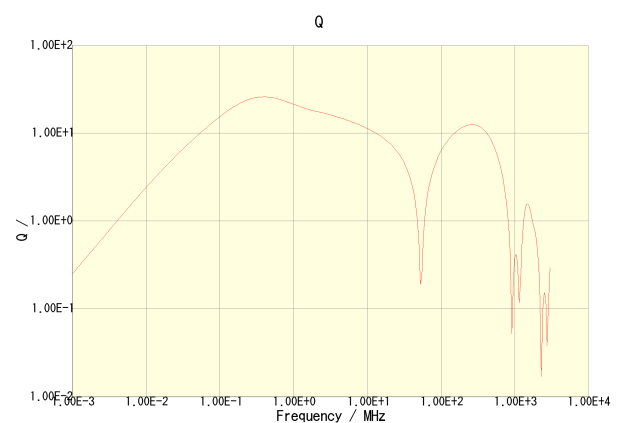


VLS3015ET-4R7M

VLS3015ET-4R7M

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

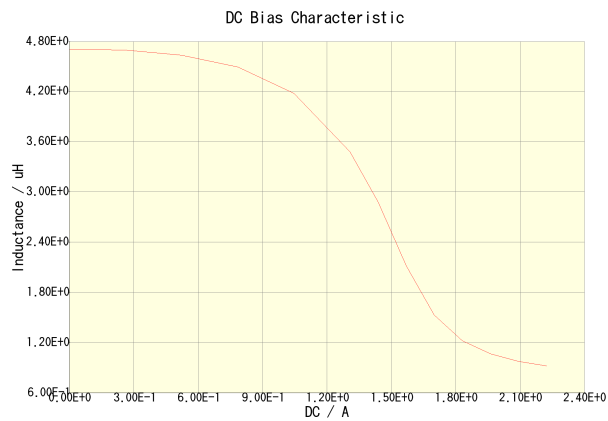


VLS3015ET-4R7M(Amb. Temp. = 20degc)

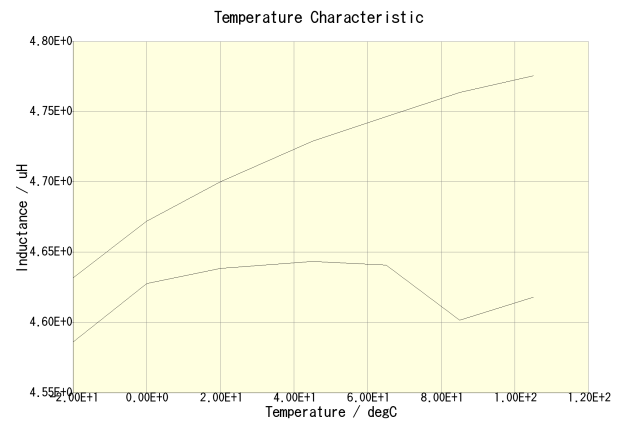

VLS3015ET-4R7M(DC = 0A)

VLS3015ET-4R7M(DC = 0.5A)

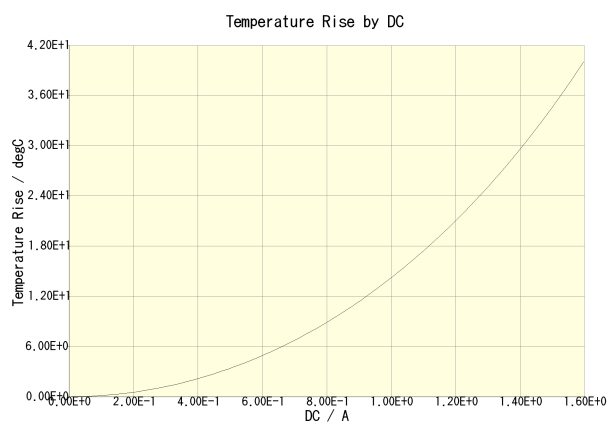

VLS3015ET-4R7M(Amb. Temp. = 20degc)