
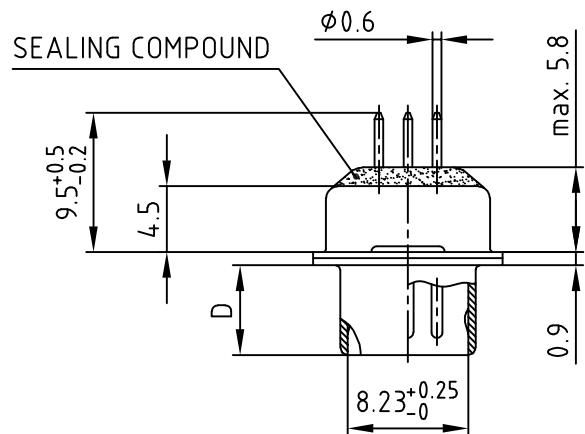
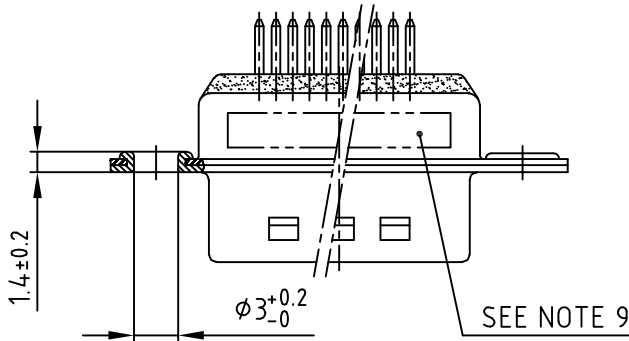


used for: D-SUB HD FILTER

POS.	A- ^{-0.76}	B- ^{+0.25}	C	D- ^{-0.3}	PART-NO.
26	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12	241A16430X
44	53.42	38.84	47.04 ^{+0.13} _{-0.1}	5.99	241A16440X
62	69.70	55.30	63.50 ^{+0.13} _{-0.1}	5.99	241A16450X

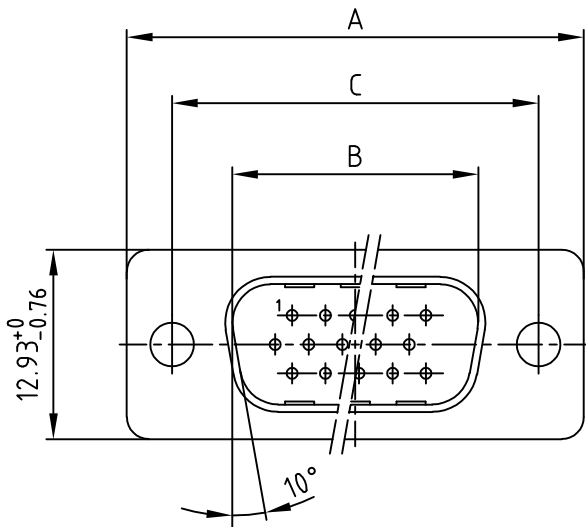


NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
CONTACT TAILS PRETINNED
6. P.C.B. HOLE DRILLINGS ON SHEET 2
7. CAPACITANCE: 830pF ±20%
8. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
9. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

RoHS compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND


				tolerance		 dim. in mm
				2007	date	name
				drawn	22.05.	Lehmenkühler
				appd.	22.05.	Fischer
				norm	DIN 41652	
				d-old		
a	Origin					
rev.	description	date	name			

CONEC


24K1A998

used for:	D-SUB HD FILTER
-----------	-----------------


26 pos.

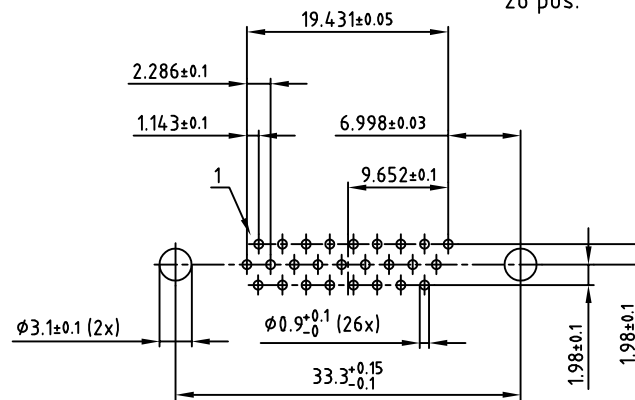

44 pos.

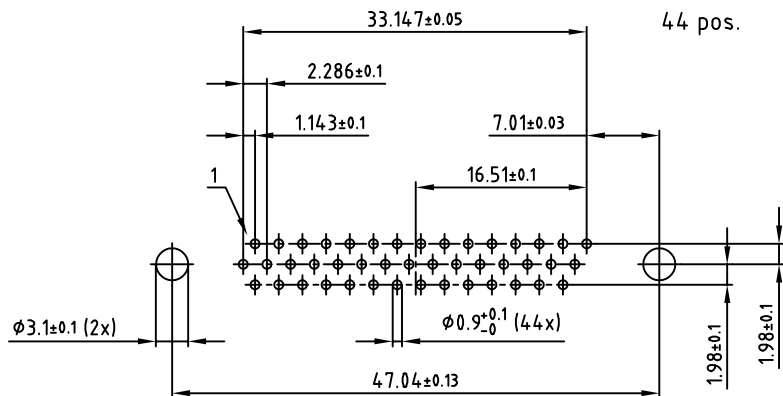

62 pos.

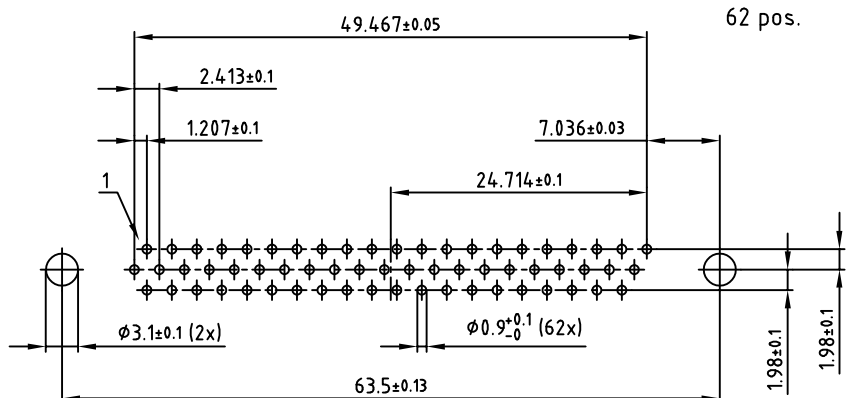

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

				tolerance		 dim. in mm	
				2007	date	name	
				drawn	22.05.	Lehmenkühler	
				appd.	22.05.	Fischer	
				norm	DIN 41652		
				d-old			
a	Origin						
rev.	description	date	name				

scale:	2:1	
material:	SEE SHEET 1	
title:	P.C.B. HOLE DRILLINGS	
	D-SUB HD FILTER MALE 26-62pos. SOLDER PIN	
dwg no:	AutoCAD 2006	DIN-A
	24K1A998	3
		sh-2/2
part no:	SFF SHEET 1	