MATERIALS AND FINISHES:

SMA JACK STR IP68
BODY: CRIMP TUBE BRASS
PLATED GOLD

CENTER CONTACT: BERYLLIUM COPPER
PLATED GOLD SEE TABLE

INSULATOR: TEFLON

JAM NUT BRASS
PLTED GOLD

LOCK WASHER: SEE TABLE
PLATED GOLD

GASKET SILICONE RUBBER

CMP CONNECTOR


BODY: PHOSPHOR BRONZE
PLATED GOLD


CENTER CONTACT: PHOSPHOR BRONZE
PLATED GOLD


HOUSING: PBT

SHRINK TUBE: VERSAFIT OR EQUIVALENT

CABLE: DIA 1.37 OR EQUIVALENT

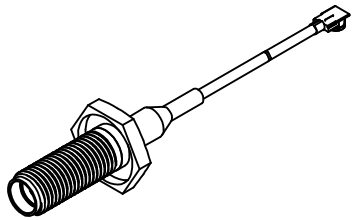

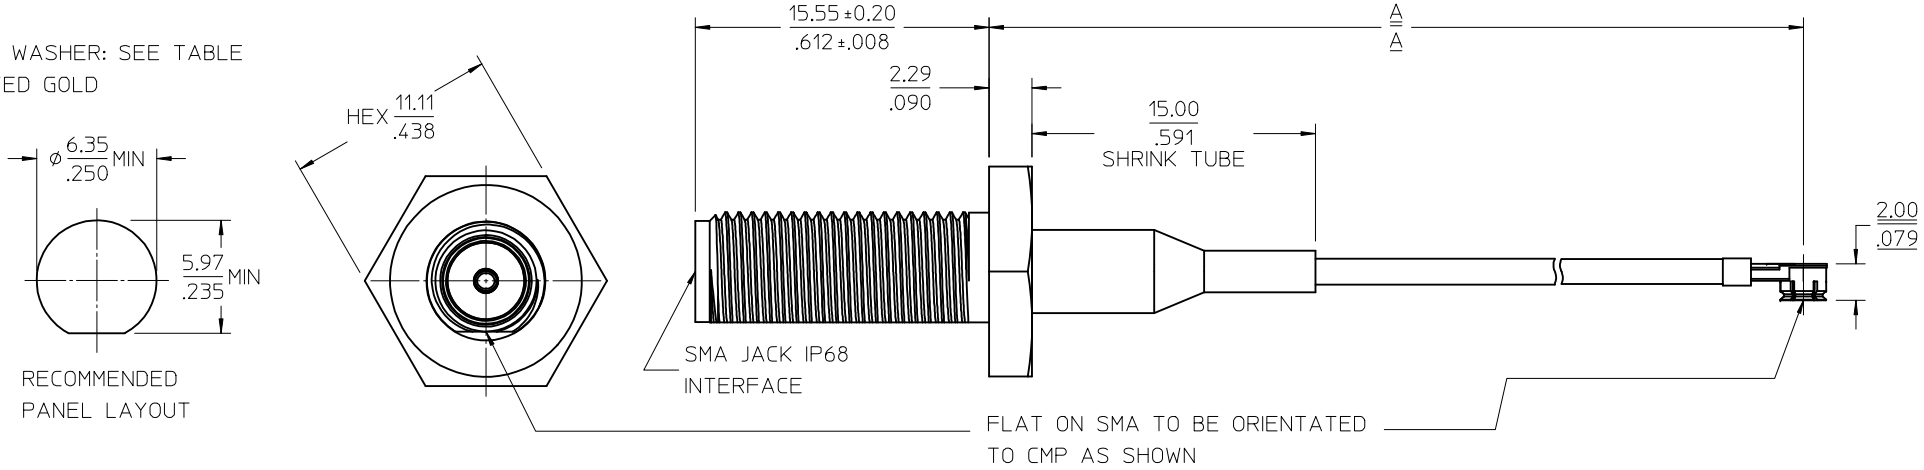

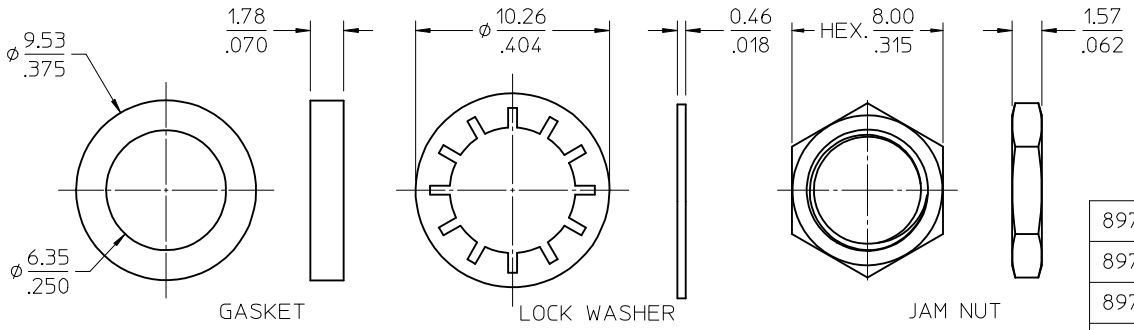

89761-5372	GOLD FLASH	SPCC
89761-5371	10 MICROINCHES MIN	PHOSPHOR BRONZE
89761-5370	10 MICROINCHES MIN	PHOSPHOR BRONZE
PART NO.	CENTER CONTACT	LOCK WASHER

89761-5372	3.543±.079	90.00±2.00	POLYBAG
89761-5371	7.874±.197	200.00±5.00	POLYBAG
89761-5370	3.543±.079	90.00±2.00	POLYBAG
PART NO.	IN	MM	PACKAGING
DIM	A		

MIL-STD-348A, FIG. 310.2	SMA JACK INTERFACE
SPECIFICATION	DESCRIPTION

CHG: TYPO MXT PN
PER RF15-E393
EC NO: URF2016-0391 2015/10/01
DRWN:CWEI02
CHKD:
APPR:YCHENG 2015/11/25
DESCRIPTION

A4
REV

QUALITY SYMBOLS
E1 =0
E2 =0
E3 =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	CWEI02	DATE 2010/08/27
CHECKED BY	KERRIE	DATE 2010/08/27
APPROVED BY	MHUANG	DATE 2010/09/18

TITLE
CA, SMA JACK BLKHD IP68
TO CMP WITH 1.37MM CABLE
CA-SMA_J/CMP_P

molex

MATERIAL NO. SEE TABLE
DOCUMENT NO. SD-89761-537
SHEET NO. 1 OF 1
SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION