

PART NUMBER
134-1001-441

REV	ECO	DATE
1	INITIAL RELEASE	08/12/2021

1. MATERIAL AND FINISH:
- 1.1 BODY: BRASS, NICKEL PLATE

1.2 CONTACT: BERYLLIUM COPPER, GOLD PLATE

1.3 INSULATOR: PTFE

1.4 O-RINGS: SILICONE RUBBER
2. ELECTRICAL SPECIFICATIONS:
- 2.1 IMPEDANCE: 50 OHMS NOMINAL



2.2 FREQUENCY RANGE: DC-6 GHZ

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VRMS

2.4 INSULATION RESISTANCE: 1,000 MEGOHMS
3. MECHANICAL SPECIFICATIONS:
- 3.1 CONNECTOR DURABILITY: TNC 500 CYCLES MIN.
MCX 500 CYCLES MIN.

3.2 PANEL THICKNESS: .197 [5.0] MAX.

3.3 CONNECTOR MEETS: CECC 22 220, MIL-PRF-39012, MIL-STD-348

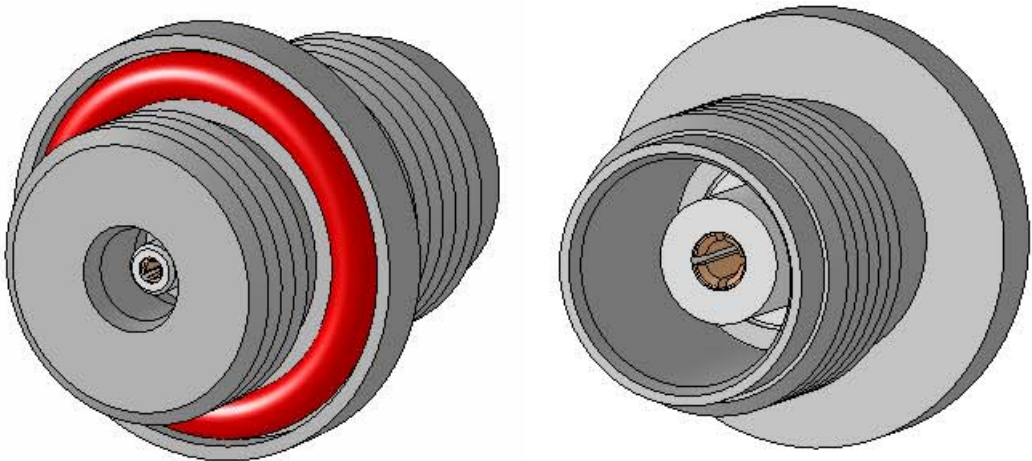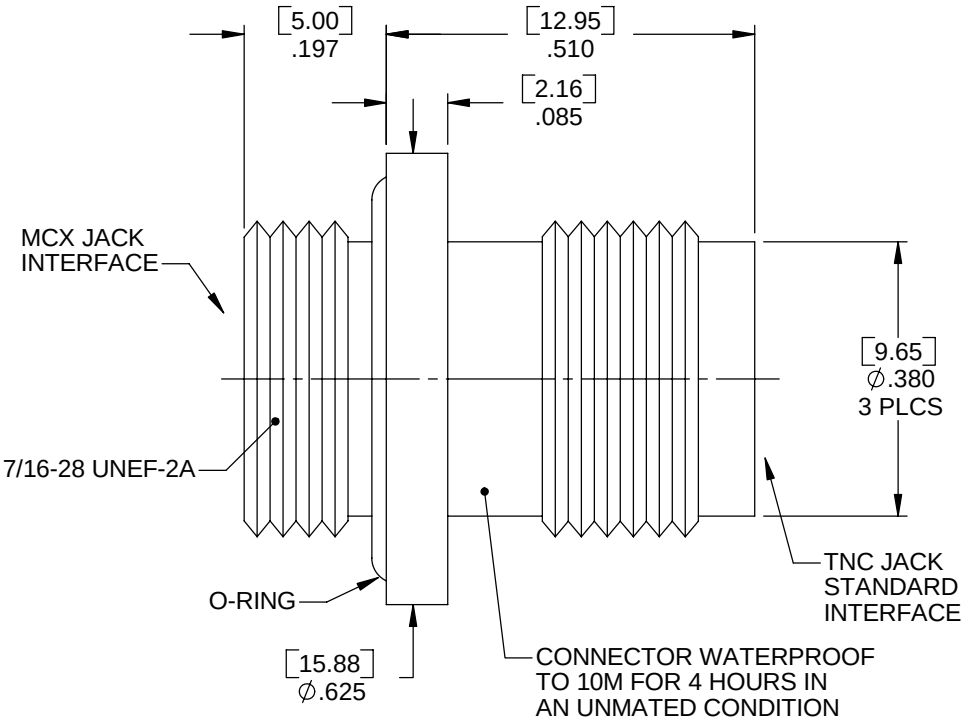

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	Model No: 134-1001-441/450		JOHNSON				
	RoHS ☒ EU/2015/863 COMPLIANT		Cage Code		Title: TNC JACK TO MCX JACK BULKHEAD ADAPTER		
	UNLESS OTHERWISE SPECIFIED UNITS: INCH		3RD ANGLE PROJECTION 		Drawing No: 134-1001-441/450		REV. 1
	.XXX ±.008 .XXXX ±.004 ANGLES ±5°		Drawn by: TOMMY REN Date: 08/12/2021		Size B DO NOT SCALE DRAWING		Workmanship Std: NONE Sheet 1 OF 1