


© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR–25–265528	16DEC2025	MK	AK

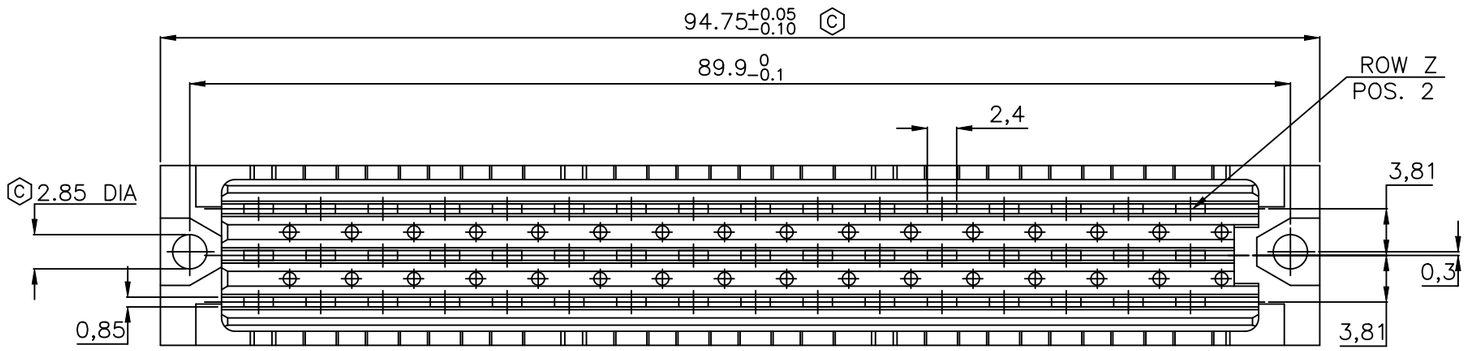

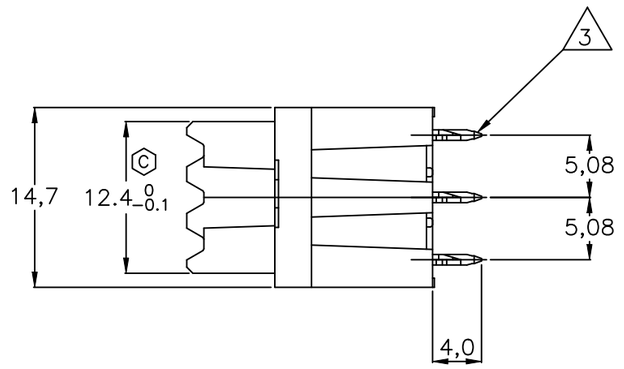

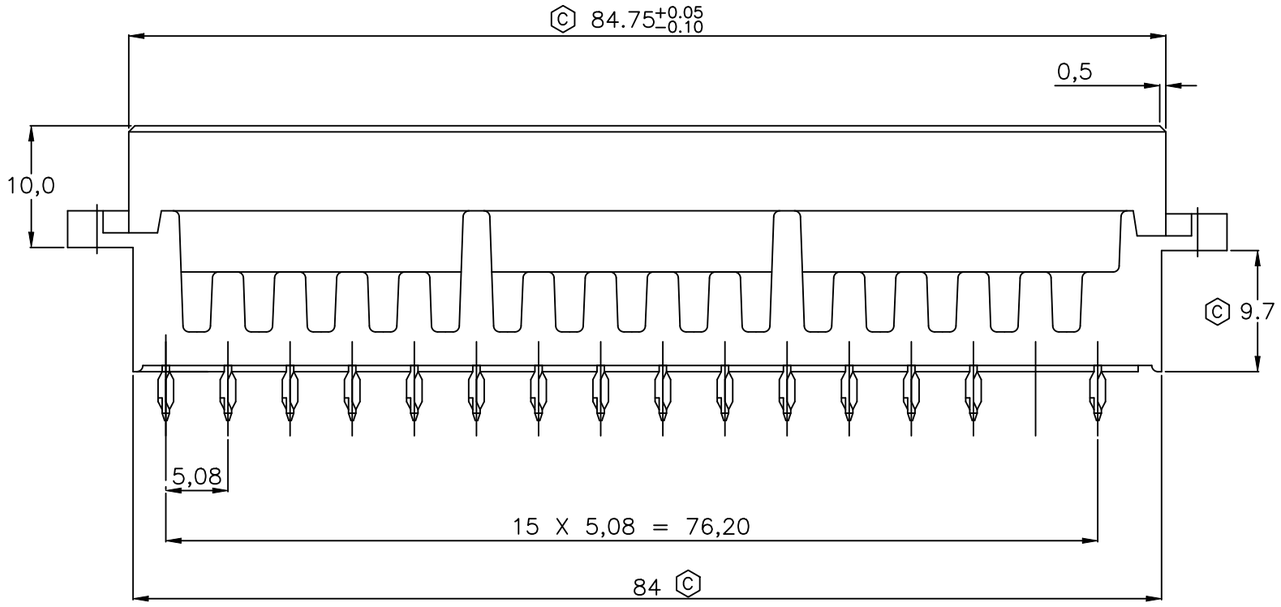

NOTES:

1. MATERIAL : – HOUSING : POLYESTER G.F.
   COLOUR : GREY.
   – CONTACTS : PHOSPHORBRONZE.
2. FINISH : –1: EIC 60603–2 PERFORMANCE LEVEL I OVER NICKEL IN CONTACT AREA.
   –4: EIC 60603–2 PERFORMANCE LEVEL II OVER NICKEL IN CONTACT AREA.
3. FOR P.C.B.–THICKNESS 1,6–2,4

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1,15 ± 0,025 mm
FIN. HOLE	: 0,94 to 1,09 mm
AFTER REFLOW	: 0,91 to 1,09 mm
Cu–thks	: 0,025 to 0,075 mm
SnPb–thks	: 0,004 to 0,010 mm

POS	ROW z	ROW b	ROW d
32	X	o	X
30	X	o	X
28	X	o	X
26	X	o	X
24	X	o	X
22	X	o	X
20	X	o	X
18	X	o	X
16	X	o	X
14	X	o	X
12	X	o	X
10	X	o	X
8	X	o	X
6	X	o	X
4	o	o	o
2	X	X	X

AN ASTERISK ,,X'' DENOTES A CONTACT.

OBSOLETE	SEE NOTE 2	SEE NOTE 1	188826–4 / ~~188826–1~~
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: –
FINISH: –

DWN J.GIBBELS 18OCT95
CHK R.V.LOKVEN –
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME: 31 POS. TYPE F FEMALE B.T.B. – A.P. CONNECTOR.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–188826	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV C