




Automotive Parts > Automotive Connectors > Data Connectivity Housings

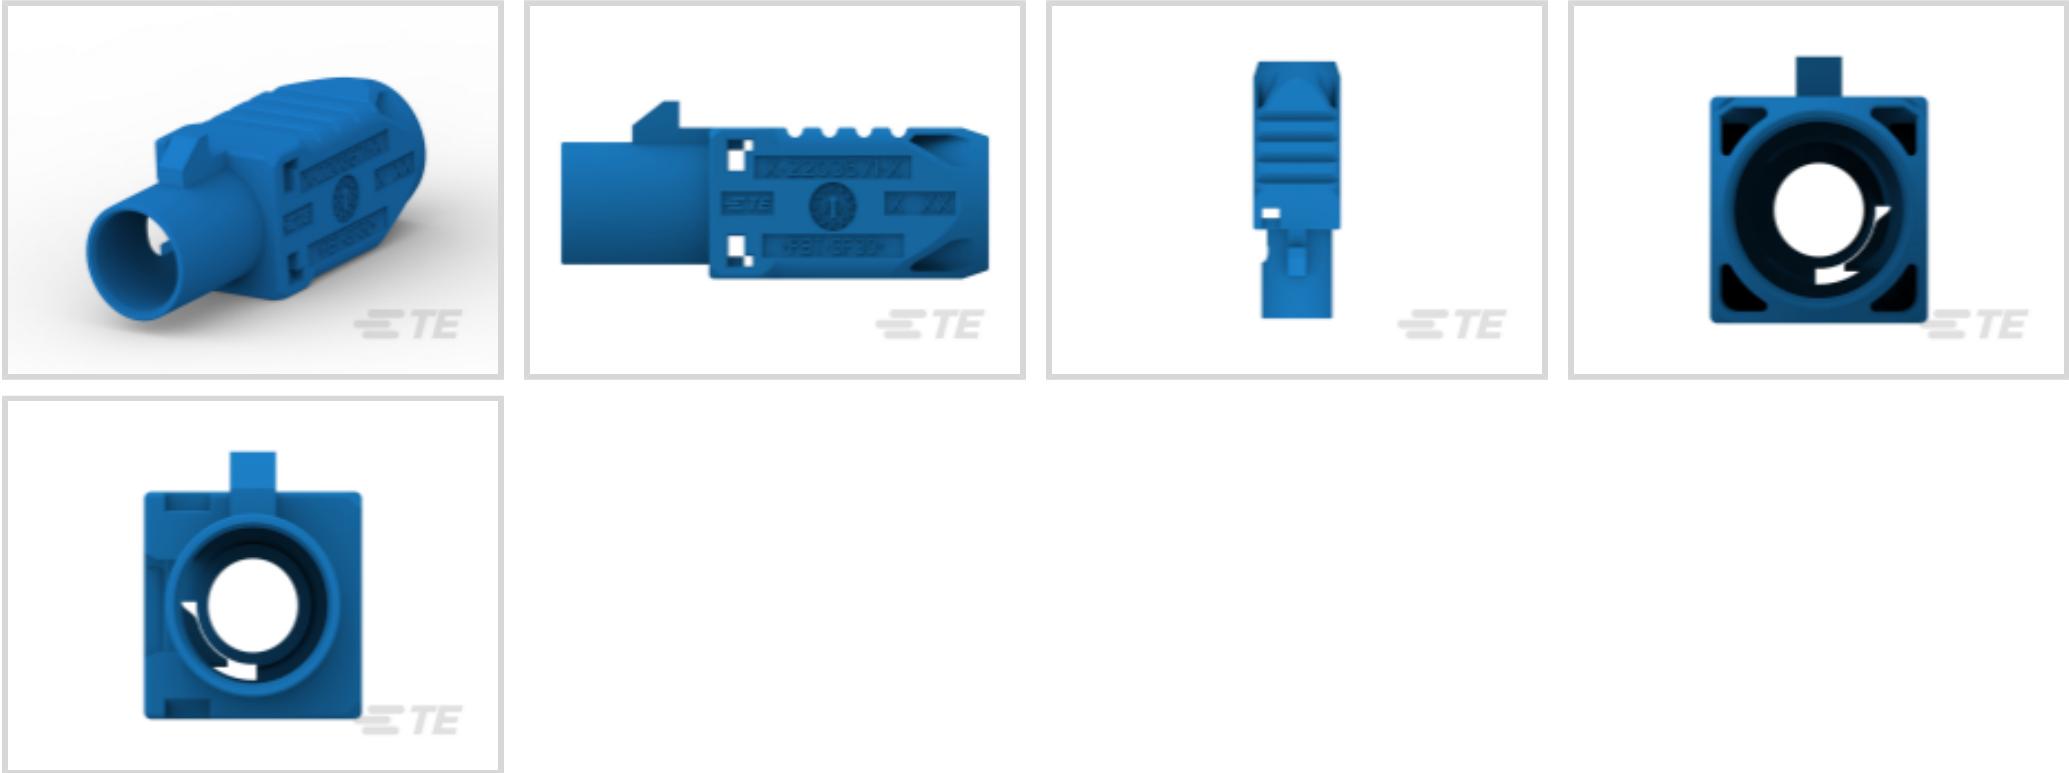

Connector System: **Cable-to-Cable**

Sealable: **No**

Cable Exit Angle: **180°**

Number of Positions: **1**

Connector & Keying Code: **Z**

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Connector System	Cable-to-Cable
Sealable	No
Connector & Housing Type	Housing for Male Terminals

Configuration Features

Number of Rows	1
Number of Positions	1

Electrical Characteristics

Operating Voltage	800 VAC
Nominal Voltage Architecture	800 V

Body Features

Body Material	Polyester PBT
Cable Exit Angle	180°
Connector & Keying Code	Z



Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Color	Water Blue
---------------	------------

Dimensions

Product Width	9.25 mm[.364 in]
Product Length	27.25 mm[1.072 in]
Connector Height	10.88 mm[.428 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Cable Type	Coaxial
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Shielded	No
Circuit Application	Signal

Packaging Features

Packaging Method	Carton
Packaging Quantity	8000

Other

Connector Position Assurance Capable	No
--------------------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250)



	Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2312640-1
RETAINER, MALE, 1 POS, FAKRA
AUTOMATED

Also in the Series | FAKRA

Automotive Connector Caps & Covers (3)	Connector Contacts(1)	Data Connectivity Housings(507)	Power Contacts(1)

Customers Also Bought




TE Part #927368-1
8P MIN D-FLACHF GEH



TE Part #965687-1
FIXING RING



TE Part #965784-1
connector ABDECKKAPPE 180GRD

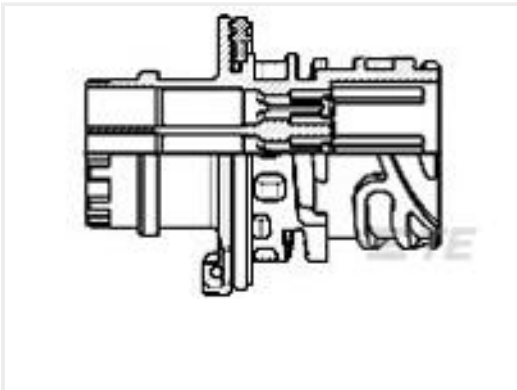

TE Part #1-967402-1
2,5MM ST-GEH KPL 4P



TE Part #2298494-1
MATE-AX, Socket outer contact, RG 174



TE Part #2298496-1
MATE-AX, Socket center contact, RG 174



TE Part #2298509-1
MATE-AX, Crimp Ferrule, RG 174



TE Part #2-2354439-9
4P,MATE-AX,SOC HSG ASSY,SLD, 180DEG,CPA,Z



TE Part #CAT-AI5-ADH16
AMPSEAL 16 Connector with Coaxial Terminal Headers

Documents

Product Drawings

HOUSING, INLINE MALE, FAKRA

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2203571-0_E1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2203571-0_E1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2203571-0_E1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English

Application Specification

English

Application Specification

English

Application Specification

English

Application Specification

English

Application Specification

English

Application Specification

English

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English