3-2199250-3 ✔ ACTIVE

TE Internal #: 3-2199250-3

C-Clip Spring Contact, 3 mm [.118 in] High, Scalable, Side Protected, 3.2 mm [.126 in] Uncompressed Height, 3.45 mm [.136 in] Length

View on TE.com >

Connectors > Contacts > PCB Spring Contacts







Spring Finger Type: **C-Clip**

Scalable: **Yes**

Side Protected: **Yes**

Uncompressed Height: **3.2 mm [.126 in]**

Product Length: **3.45 mm [.136 in]**

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
Spring Finger Type	C-Clip
Scalable	Yes

Configuration Features

Number of Positions	1
Side Protected	Yes

Contact Features

Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Gold
Contact Working Range (Low)	2.3 mm[.091 in]
Contact Working Range (High)	3 mm[.118 in]
Point of Contact Area Plating Material	Gold

Contact Current Rating (Max)	2 A

Dimensions

Uncompressed Height	3.2 mm[.126 in]
Product Length	3.45 mm[.136 in]
Product Width	1.5 mm[.059 in]

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

Operation/Application

Circuit Application	Signal

Packaging Features

Packaging Method	Tape & Reel
Packaging Quantity	4500

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides


on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

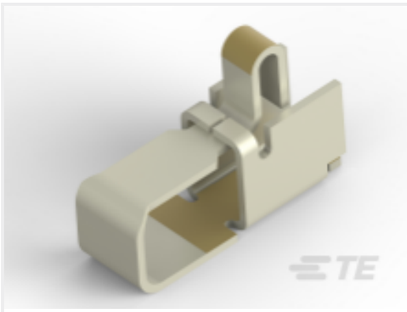


TE Part # 1903646-1
SHIELD FINGER 3014 LOW FORCE

Customers Also Bought

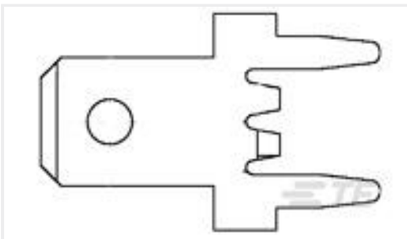

TE Part #63860-1
187 FASTON TAB TPBR



TE Part #174973-2
040 MLC CAP ASSY V 12P



TE Part #1-826648-0
10P AMPMODU II STIFT LEI




TE Part #1241150-3
3P MOD II BREAK AWAY HDR,SMD, BLISTER



TE Part #1-1241150-0
10P MOD II BREAK AWAY HDR,SMD, BLISTER



TE Part #1625812-4
3631B 22UH 20% FIO

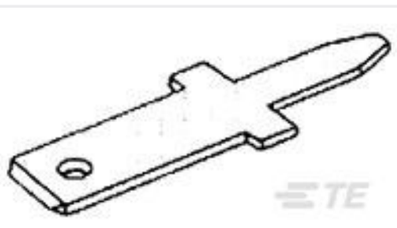

TE Part #1742428-1
110 FASTON,TAB,PCB,TPBR



TE Part #8-2176070-3
3521 27K 1% 2W



TE Part #2176117-8
TLR 1206 1.0W R007 1% 50PPM 2K RL



TE Part #3-2176372-6
RQ 0603 115K 0.1% 10PPM 5K RL

Documents

Product Drawings

Shield Finger, Loose Piece, Type C, 3.2h

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-2199250-3_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-2199250-3_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-2199250-3_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

English