

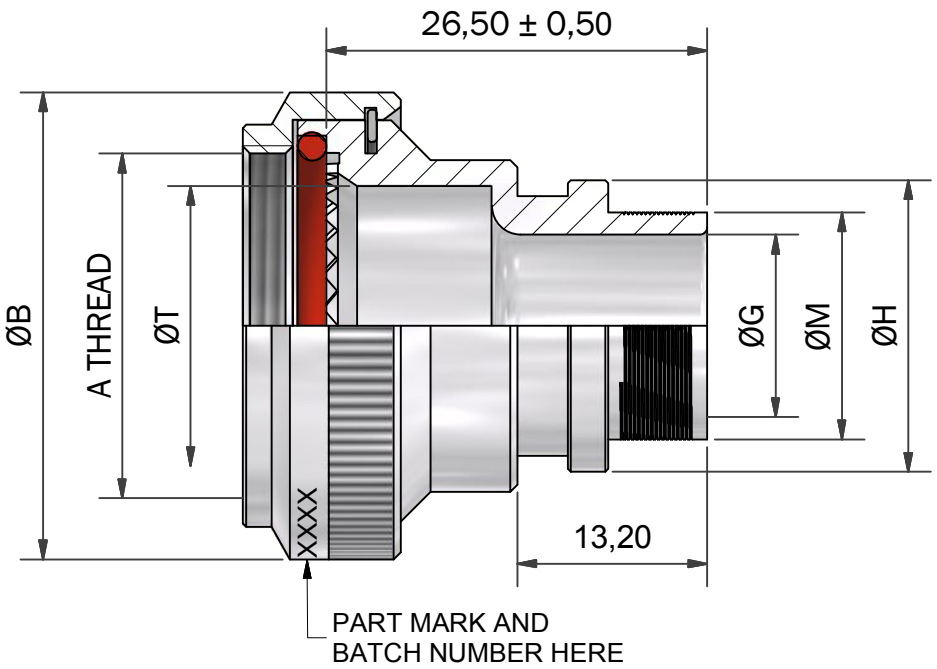



ANGLE 1

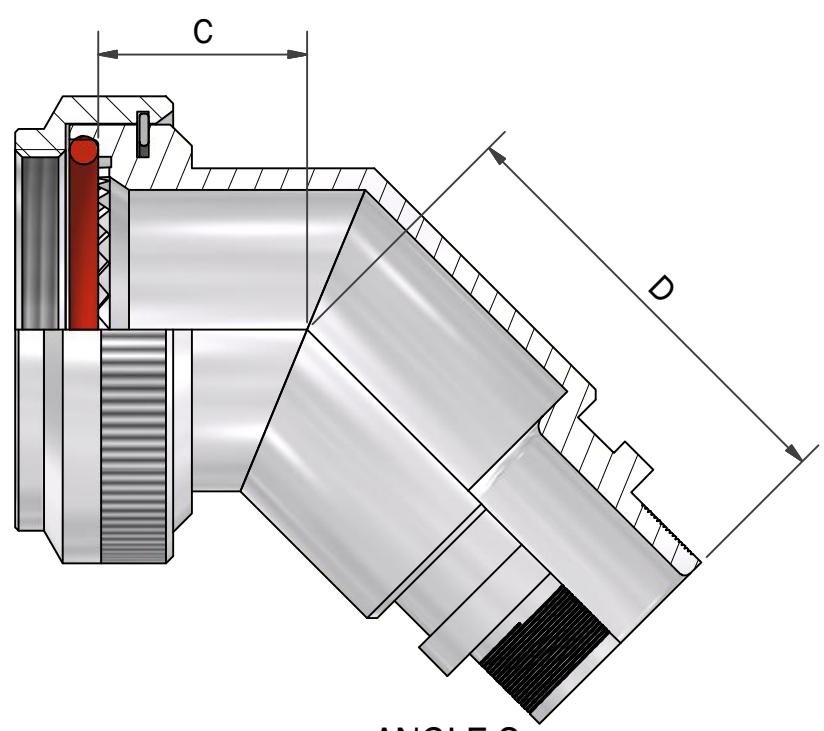

ANGLE 2

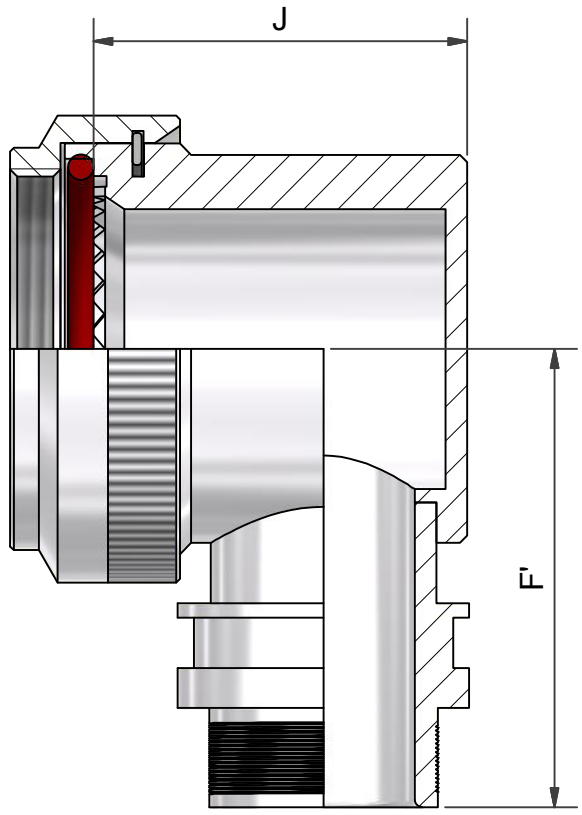

ANGLE 3
LOW PROFILE OPTION

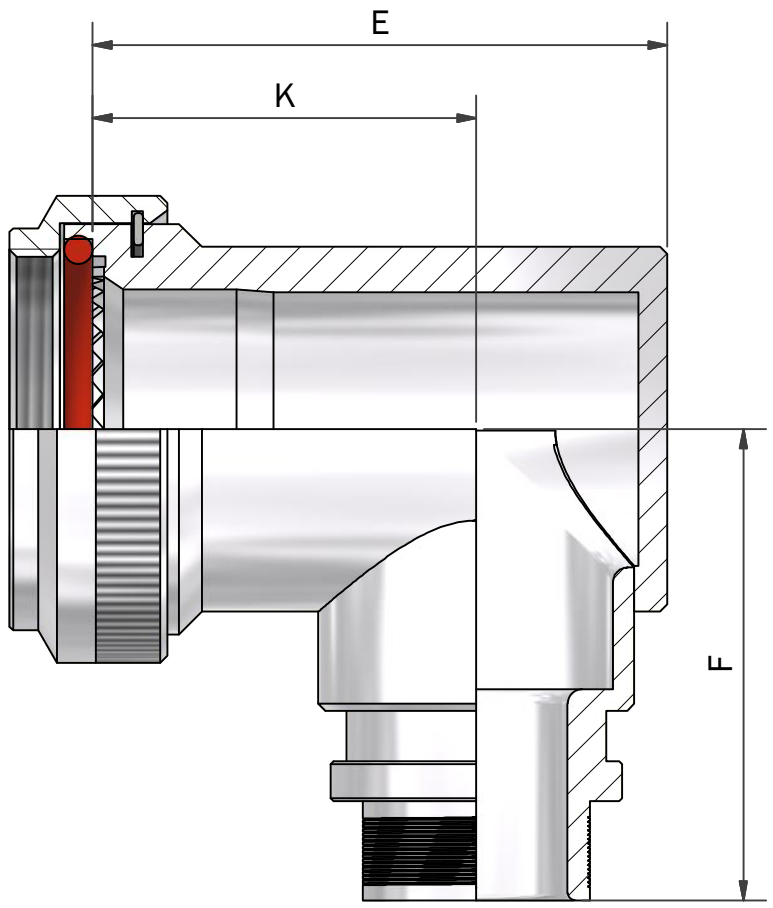

ANGLE 3

DRAWN	DATE	3RD ANGLE PROJECTION NOT TO SCALE	PART NUMBER: 60H SERIES		
J.CLARK	14/08/2011				
DESIGN APPROVAL	DATE	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°	TITLE: MEMORY METAL RING ADAPTOR		
K.SHEPPARD	07/09/2011				
DOC TYPE	Customer Drawing	**MATERIAL** SEE PART NUMBER BREAKDOWN	ASSY USED ON: MIL-DTL-38999 SERIES III & IV	RESTRICTED TO:	
ISSUE/REV AA	DCR ---	**FINISH** SEE PART NUMBER BREAKDOWN	THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	POLAMCO LTD, WESTON LOCK, LOWER BRISTOL ROAD BATH BA2 1EP	SHT 1
NCAGE CODE U5792	WEIGHT 32.25 g				DRAWING NO: P10745

TABLE 1

SHELL SIZE	A THREAD	ØB MAX	ØT MIN	C MAX	D MAX	E MAX	F MAX	K ±0,5	J MAX	F' MAX	MAX ENTRY FOR LOW PROFILE OPTION
09	M12 x 1.0	18,0	6,7	13,1	26,8	25,7	26,4	17,5	18,0	27,4	04
11	M15 x 1.0	21,0	10,2	13,9	27,6	26,7	28,2	17,5	22,0	29,2	05
13	M18 x 1.0	24,5	13,5	14,5	28,0	31,2	29,7	20,0	22,0	30,7	06
15	M22 x 1.0	29,0	16,2	15,5	29,0	37,2	31,2	24,5	25,0	32,2	07
17	M25 x 1.0	32,5	19,4	16,1	29,8	40,2	32,9	26,7	27,0	33,9	08
19	M28 x 1.0	35,5	21,8	16,8	30,6	44,7	34,5	27,0	28,0	35,7	10
21	M31 x 1.0	37,0	25,1	17,1	30,9	49,2	36,1	30,5	29,0	37,1	10
23	M34 x 1.0	40,0	28,2	17,7	31,2	51,7	37,6	31,5	31,7	38,6	10
25	M37 x 1.0	43,5	31,4	18,4	32,1	53,2	39,1	28,5	31,7	40,1	10

TABLE 2

ENTRY SIZE	ØG MIN	ØH MAX	ØM MAX
04	6,3	14,3	9,5
05	7,9	15,8	11,1
06	9,5	17,4	12,7
07	11,1	19,0	14,3
08	12,7	20,6	15,9
10	15,8	23,8	19,0
12	19,0	27,0	22,2
14	22,2	30,1	25,4
16	25,4	33,3	28,6
18	28,5	36,5	31,8
20	31,7	39,7	34,9
22	34,9	42,8	38,1
24	38,1	46,0	41,3

TABLE 3

CODE	FINISH
C	ELECTROLESS NICKEL
B	CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
ZB	ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL
ZN	ZINC NICKEL BLACK PASSIVATE OVER ELECTROLESS NICKEL

SEE SS0076 FOR FULL RANGE OF FINISH OPTIONS

60H1-17-08-1-C-A

- SERIES
- CONNECTOR INTERFACE
- ANGLE
- SHELL SIZE (TABLE 1)
- ENTRY SIZE (TABLE 2)
- MATERIAL
  - ALUMINIUM ALLOY
- FINISH (TABLE 3)
- LOW PROFILE OPTION (90° ONLY)
  - OMIT IF STANDARD REQUIRED
- RING OPTION
  - A - RING TO SUIT SINGLE BRAID
  - B - RING TO SUIT DOUBLE BRAID
  - OMIT IF NO RING REQUIRED

DRAWN	DATE
J.CLARK	14/08/2011
DESIGN APPROVAL	DATE
K.SHEPPARD	07/09/2011
DOC TYPE	Customer Drawing
ISSUE/REV AA	DCR ---
NCAGE CODE U5792	WEIGHT

3RD ANGLE PROJECTION NOT TO SCALE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°

MATERIAL
SEE PART NUMBER BREAKDOWN

FINISH
SEE PART NUMBER BREAKDOWN

PART NUMBER: 60H SERIES

TITLE: MEMORY METAL RING ADAPTOR

ASSY USED ON: MIL-DTL-38999 SERIES III & IV

RESTRICTED TO:

THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.

POLAMCO LTD, WESTON LOCK, LOWER BRISTOL ROAD BATH BA2 1EP

Polamco

TE connectivity

SHT 2

DRAWING NO: P10745