



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 125 °C [257 °F]
Expanded Inside Diameter (Min): 7.11 mm [.28 in]
Recovered Inside Diameter (Max): 3.56 mm [.14 in]
Pre-Installed Lead: No
Resistance Properties: Moisture & Spray Protection

Features

Product Type Features

Interconnect Device Splice Type	SolderSleeve
Temperature Indicator	No
Temperature Indicator Type	None

Configuration Features

Pre-Installed Lead	No
--------------------	----

Dimensions

Expanded Inside Diameter (Min)	7.11 mm[.28 in]
Recovered Inside Diameter (Max)	3.56 mm[.14 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Resistance Properties	Moisture & Spray Protection
Wire Temperature (Max)	125 °C

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted



	Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (18% in Solder) Pb (32% in Solder) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG8162-000

HL1920E-230V-EURO

Customers Also Bought




TE Part #416947-000
CWT-6-W122-5



TE Part #EL7645-000
TMS-CT-50M-3/16-OUT-4




TE Part #1SNG626093R0000
EP-SGL-M32-BL-D

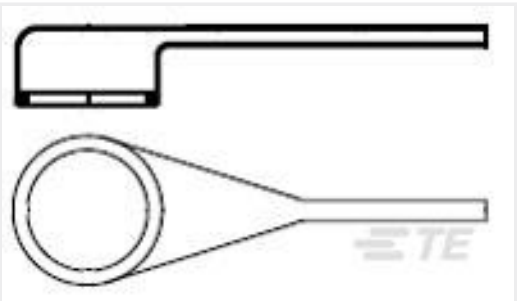

TE Part #808102-000
222D932-3-0




TE Part #120953-5
UPM EXPANDED RCPT ASSEMBLY

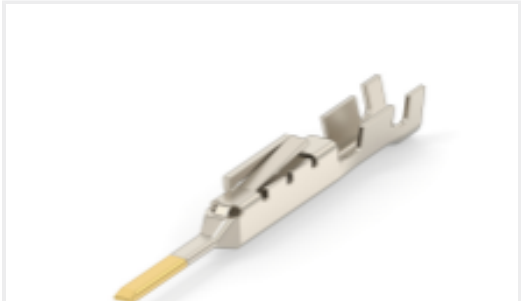

TE Part #CAT-D9934-A66
Contact: Component To Wire ; 5A, 28-18 wire size, gold plated



TE Part #2-1318114-9
DYNAMIC D2100 TAB 20P P/M Y

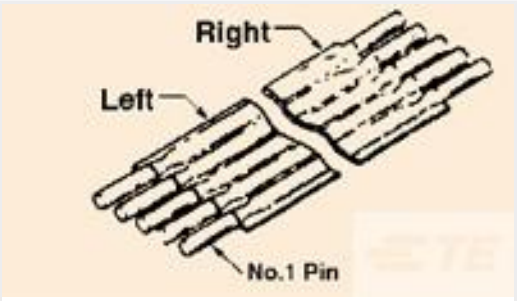

TE Part #5-1437144-6
FSN-23A-4=NOMEX FS STD

Documents

Product Drawings

CWT-9005

English

Datasheets & Catalog Pages

1654025_Sec8_B-155_CWT_D-110_D-1744

English

Product Specifications

SolderSleeve One-Step Wire and Cable Terminators Installation Procedures for CWT and B-155 Products

English