
This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


Customer Drawing

REVISIONS						
SYM	ECN	DESCRIPTION	DESIGN	CHECK	APPROVAL	DATE
1	HKXXXXX	First Release Drawing	FELIX.LIU	TONY.TANG	IP	03/25/14
2	HKXXXXX	Update the Drawing	FELIX.LIU	TONY.TANG	IP	10/30/14
3	HKXXXXX	Update Withstanding Voltage	BELLA.WU	TONY.TANG	IP	08/09'22
4	HKXXXXX	Update notes	BELLA.WU	TONY.TANG	OLIVER.YU	09/11'26

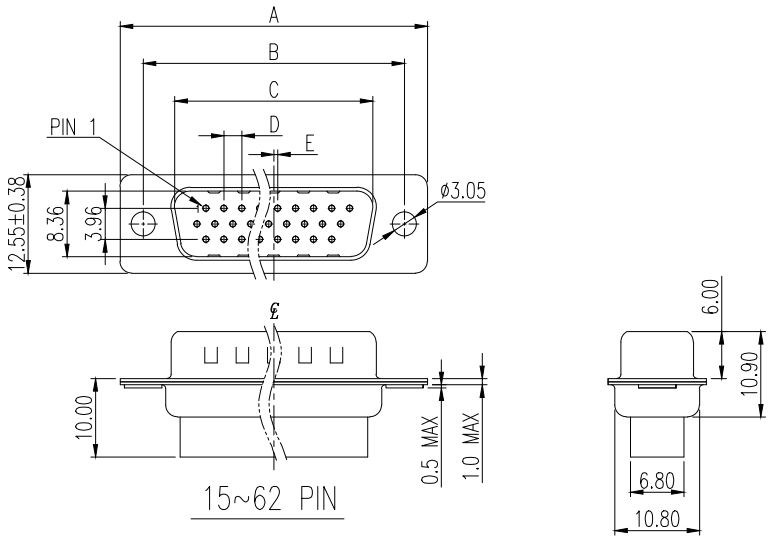

Dimensions


Shell Size	Positions	A±0.38	B	C	D	E
E	15	30.81	24.99	16.92	2.29	0.25
A	26	39.19	33.32	25.25	2.29	0.51
B	44	53.04	47.04	38.96	2.29	0.51
C	62	69.32	63.50	55.42	2.41	0.58

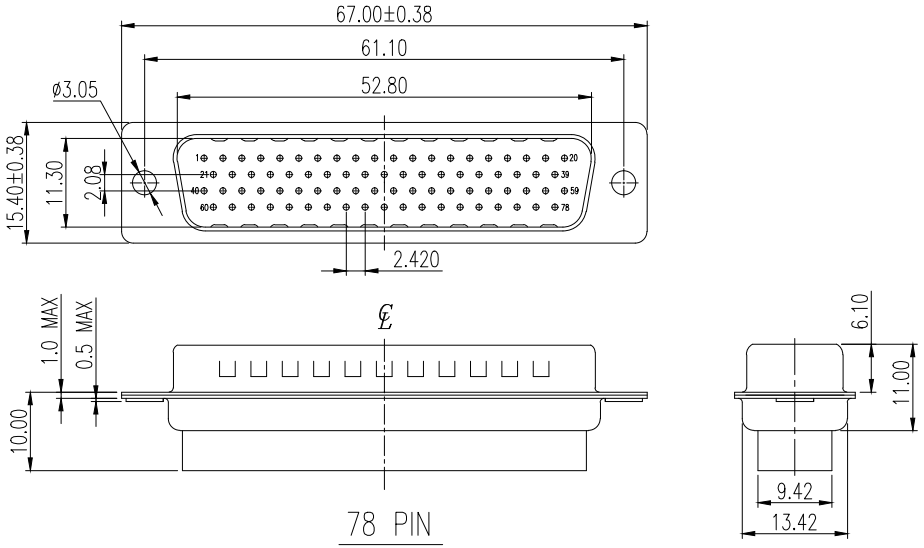

NOTES:

SHELL: Steel, 100u" min tin over 50u" min nickel over 50u" min copper.
BODY: PBT, UL 94V-0, Color:Black.
SPRING WASHER: Stainless Steel
ELECTRICAL: Withstanding Voltage >500 V RMS
Insulation resistance >1000 M Ohms
MARKING: Amphenol-...(Series No.)
Commercial reference
Manufacturing date
Recommended male terminal P/N: L17HRD2MXXXX

PRODUCT CODE

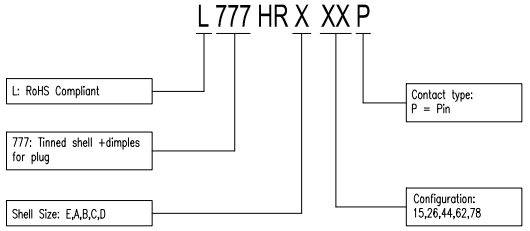

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X	+/-	0.50
.XX	+/-	0.30
.XXX	+/-	0.20
FRACTIONS	+/-	
ANGLES	+/-	5°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. / METRIC — INCHES / MM

APPROVAL		DATE
APPROVED	OLIVER.YU	09/11'26
CHECKED	TONY.TANG	09/11'26
DRAWN	BELLA.WU	09/11'26

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE
D-SUB connector, HR male housing

SIZE	DRAWING NO.	REV.
A3	L777HRXXXP	4

SCALE	1:1	SHEET 1 OF 1