



Switches > Toggle Switches



Configuration (Pole-Throw): **Double Pole - Double Throw**

Operating Function: **(On) Off (On)**

Number of Positions: **3**

Contact Current Rating: **6 A**

Operating Voltage: **28 VDC**

Features

Product Type Features

Sealed Device	Yes
Switch Connection Type	Wire Lugs
Toggle Style	Flat Actuator
Switch Type	Toggle Switch

Configuration Features

Configuration (Pole-Throw)	Double Pole - Double Throw
Operating Function	(On) Off (On)
Number of Positions	3

Electrical Characteristics

Contact Resistance	10 mΩ
Insulation Resistance	1000 MΩ
Dielectric Withstanding Voltage (Max)	1500 VAC
Contact Current Rating	6 A
Operating Voltage	125 VAC

Body Features

Actuator Finish	Satin Chrome
Case Color	Green
Product Orientation	Vertical
Bushing Style	Threaded



Bushing Thread Size	1/4-40
---------------------	--------

Contact Features

Contact Base Material	Copper Alloy
Switch Contact Plating Material	Gold Flash over Silver

Housing Features

Process Sealed	No
----------------	----

Dimensions

Toggle Length	12.32 mm[.485 in]
---------------	-------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (3.7% in component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | **ALCOSWITCH MTF**

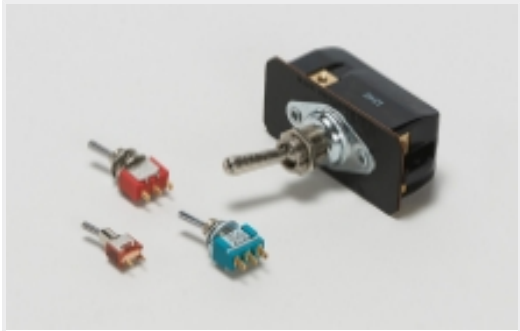

Toggle Switches(5)

Customers Also Bought



TE Part #625160-000
D-110-41



TE Part #CAT-P592-R472A
PIDG Ring Tongue Terminals



TE Part #2-1437558-0
MTA206N=(MSTA) SW TOG DPDT



TE Part #1757820-8
AMPLIMITE,ASY,RCPT,STD,109,ZN,3,CT



TE Part #0619-5-1378
R SNAP



TE Part #38943-12L
CONT SOC ASSY



TE Part #YDTS26F15-19SCV001
PLUG ASSY



TE Part #6313-201-2502
RING SEAL

Documents

Product Drawings

MTF206S=(MST-49) SW TOG DPDT

English

Datasheets & Catalog Pages

2-1773458-6_GREEN_SERIES_SWITCHES

English