
KEMET Part Number: PHE426MK4330JR17T0

(F426KG332J630L, PHE426MK4330JK01R17T0)

Capacitor, Film, Metallized Polypropylene, 3300 pF, +/-5% Tol, -55/+105C, Pulse, 630 VDC@85C, Lead Spacing=7.5 mm, Not For New Design, Please Check Possible Alternative Parts (AltPart)

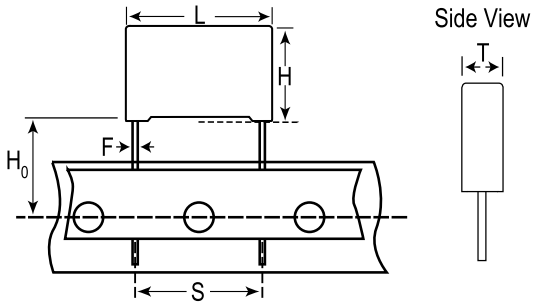

General Information	
Supplier:	KEMET
Dielectric:	Metallized Polypropylene
Application:	Pulse
Style:	Radial Box
Lead Form:	Wire Leads
Features:	Pulse
RoHS:	Yes

Dimensions (mm)		
Symbol	**Dimension**	**Tolerance**
L	10	MAX
H	8	MAX
T	4	MAX
S	7.5	+/-0.4
F	0.6	NOM
H0	17	NOM

Specifications	
Capacitance:	3300 pF
Voltage:	630 VDC
Tolerance:	+/-5%
Voltage AC:	250 VAC
Voltage:	466 VDC (105C)
Rated Temperature:	85C
Temperature Range:	-55/+105C
Dissipation Factor @ 1 kHz:	0.05%
Dissipation Factor @ 100kHz:	0.25%
Insulation Resistance:	100 GOhm
Inductance:	6
Maximum dVdT:	200 v/us
Miscellaneous:	Not For New Design, Please Check Possible Alternative Parts (AltPart)

Packaging Specifications	
Package Kind:	T&R
Package Size:	Standard
Package Quantity:	1700

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006-2016 IntelliData.net