

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	NOV.15/13	L.CHAN
B	UPDATE DRAWING	AUG.18/16	L.CHAN
C	ADD A DIMENSION	AUG.18/20	L.CHAN




FRONT VIEW

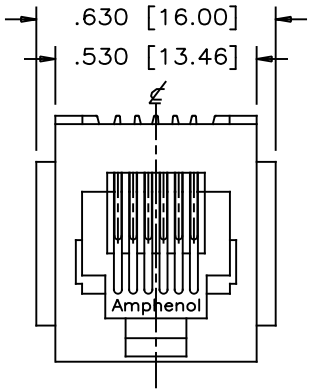

SIDE VIEW

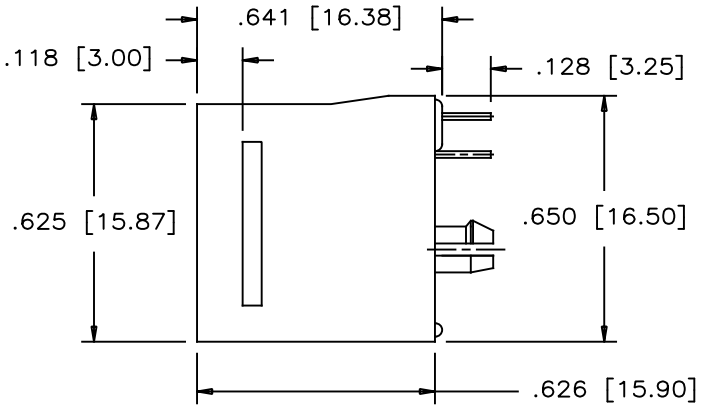

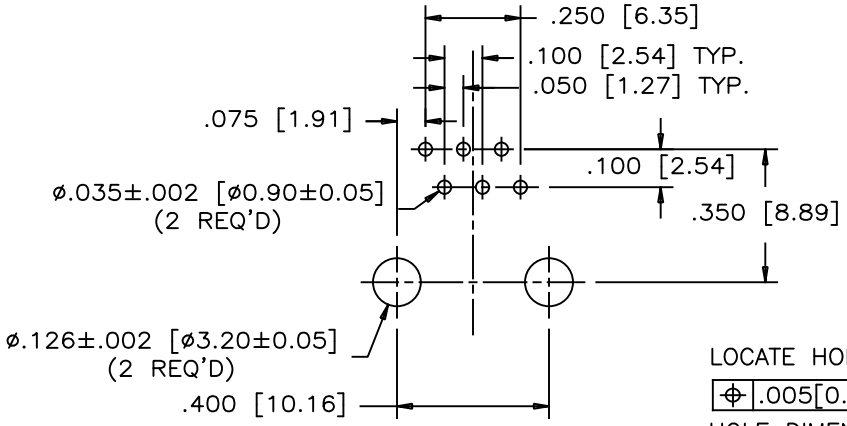

LOCATE HOLES
⌖ .005[0.13]
HOLE DIMENSIONS ARE BASIC


RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V–0,
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: REFER PART NO. FOR GOLD PLATING THICKNESS
ON MATTING SURFACE
50 u" MIN. NICKEL UNDERPLATE
100 u" MIN. MATTE TIN OR GOLD FLASH OVER TAILS

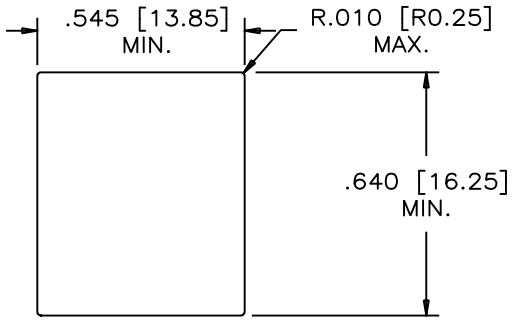

RECOMMENDED PANEL CUTOUT

AMPHENOL PART NO.: RJE08–166–0X20

GOLD PLATING
1 = 6 u"
2 = 15 u"
3 = 30 u"
4 = 50 u"

UNLESS SPECIFIED OTHERWISE	DRAWN G.HSIA	NOV.15/13	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCHES	CHECKED KELVIN.T	NOV.15/13	
SECONDARY MILLIMETERS	M.E. APP'D		MODULAR JACK, SINGLE PORT, 6 POSITION, 6 CONTACTS, TOP ENTRY WITH FLANGE–RoHS COMPLIANTE
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D L.CHAN	NOV.15/13	
1 DECIMAL PLACE ±0.38	ENG. REL. NO.		DWG NO. P–RJE08–166–0X20 REV C
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.25	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE SCALE SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.